



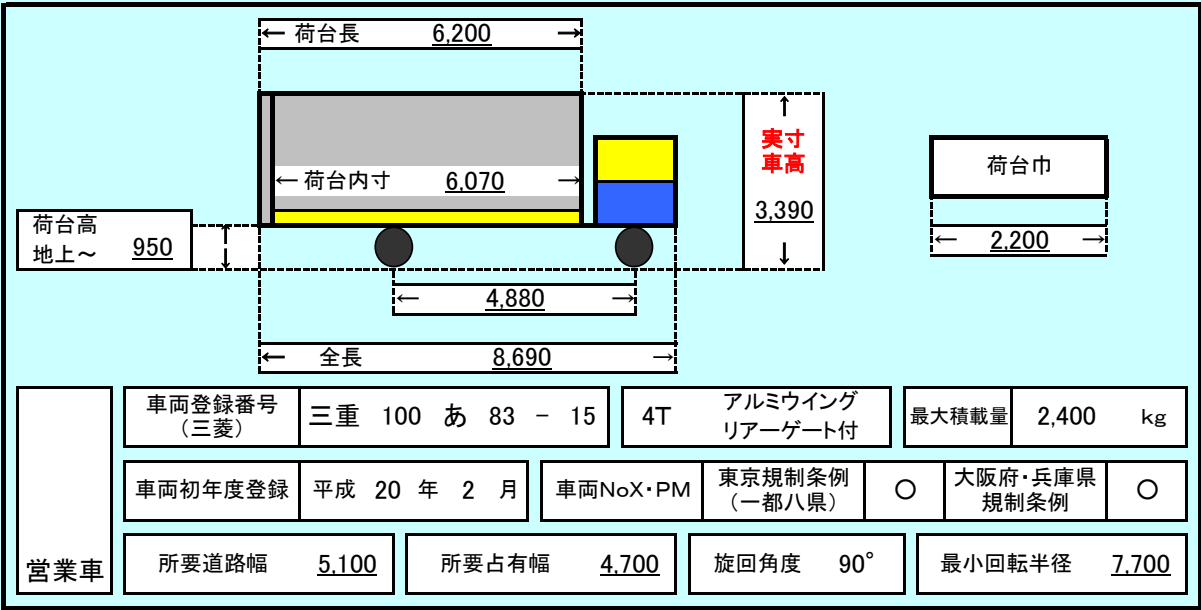
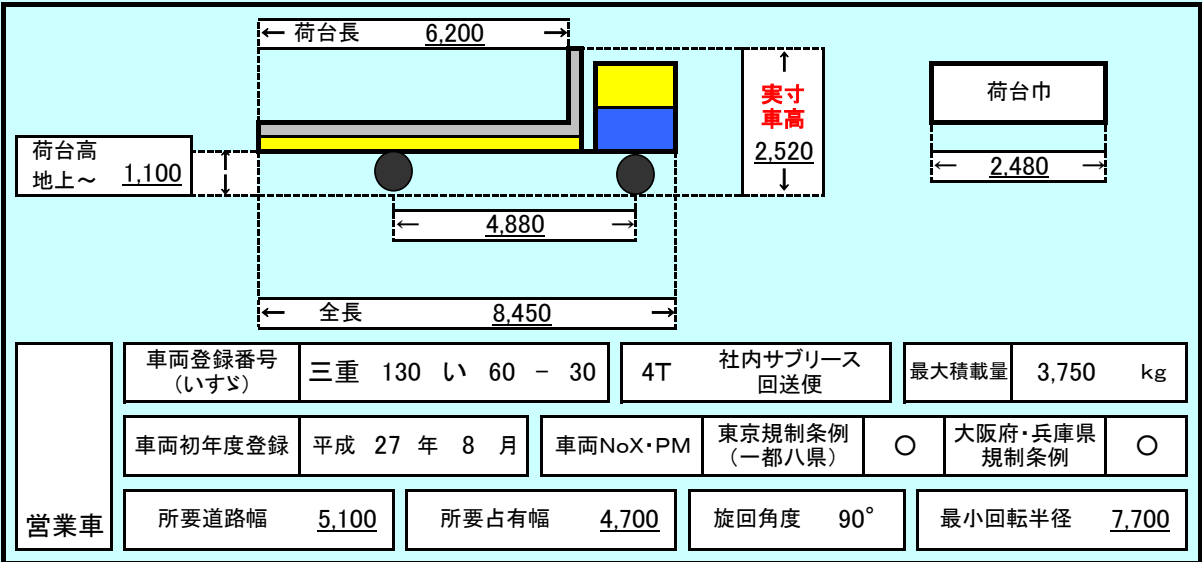
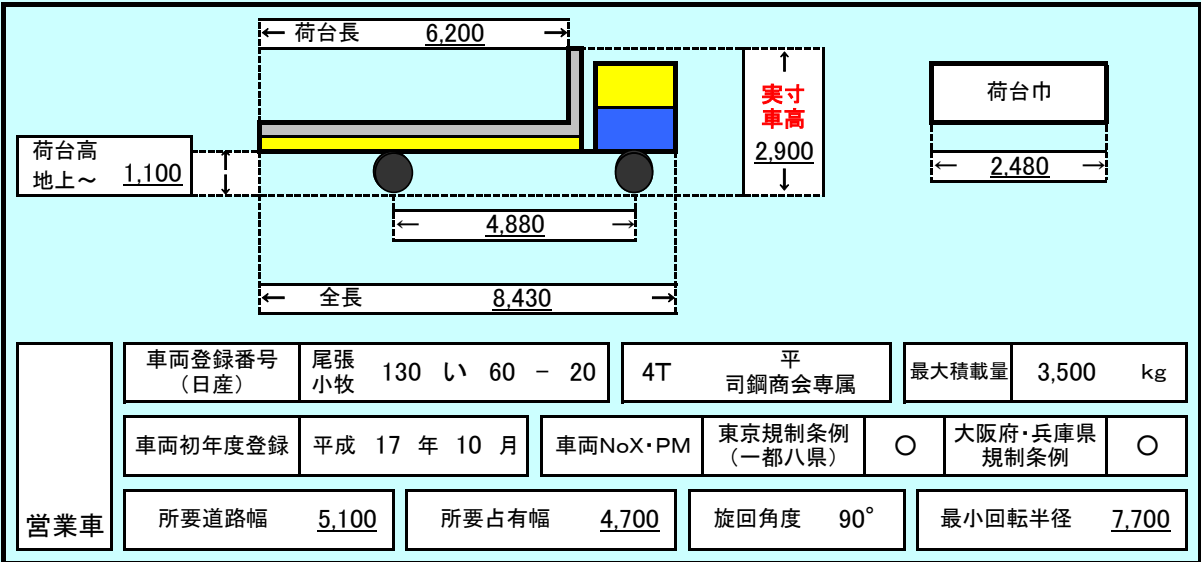
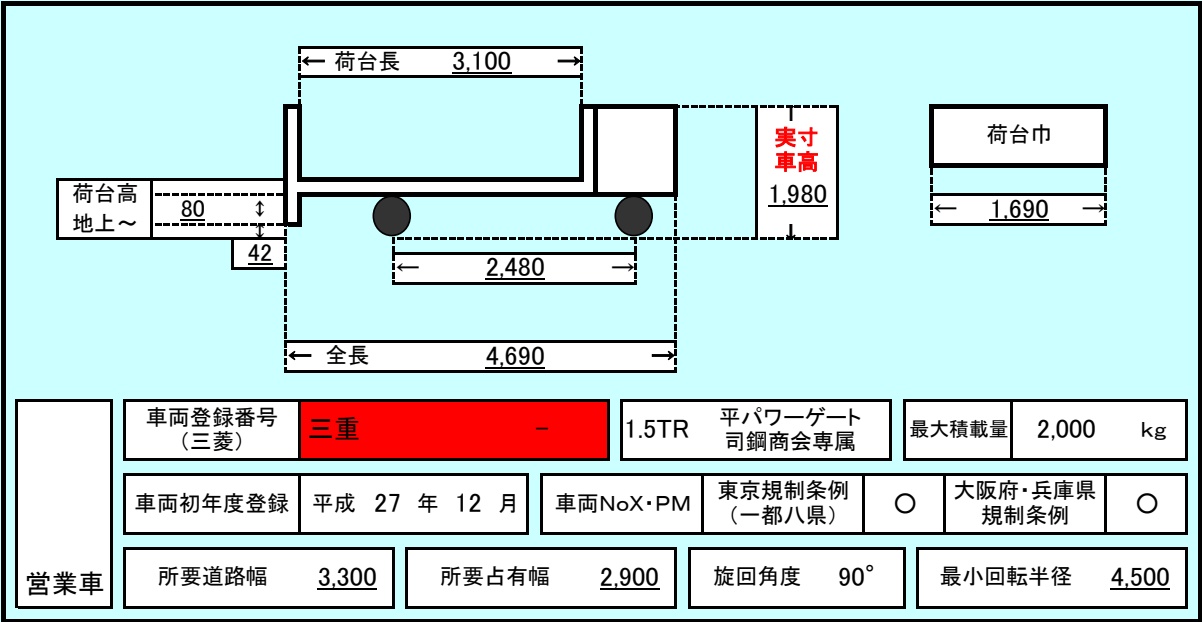
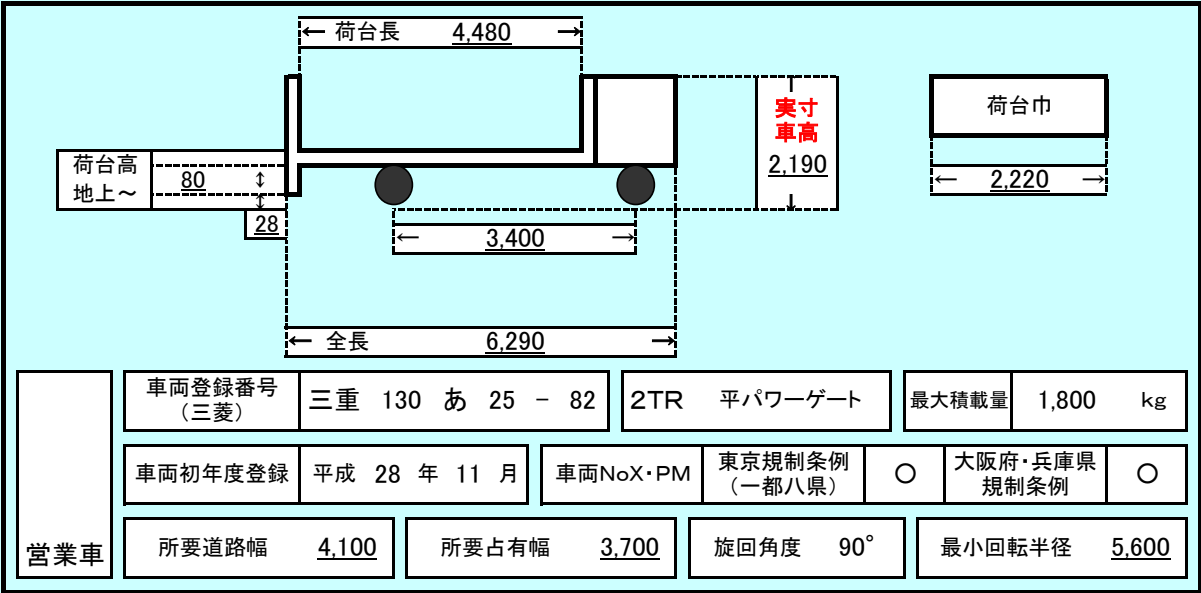
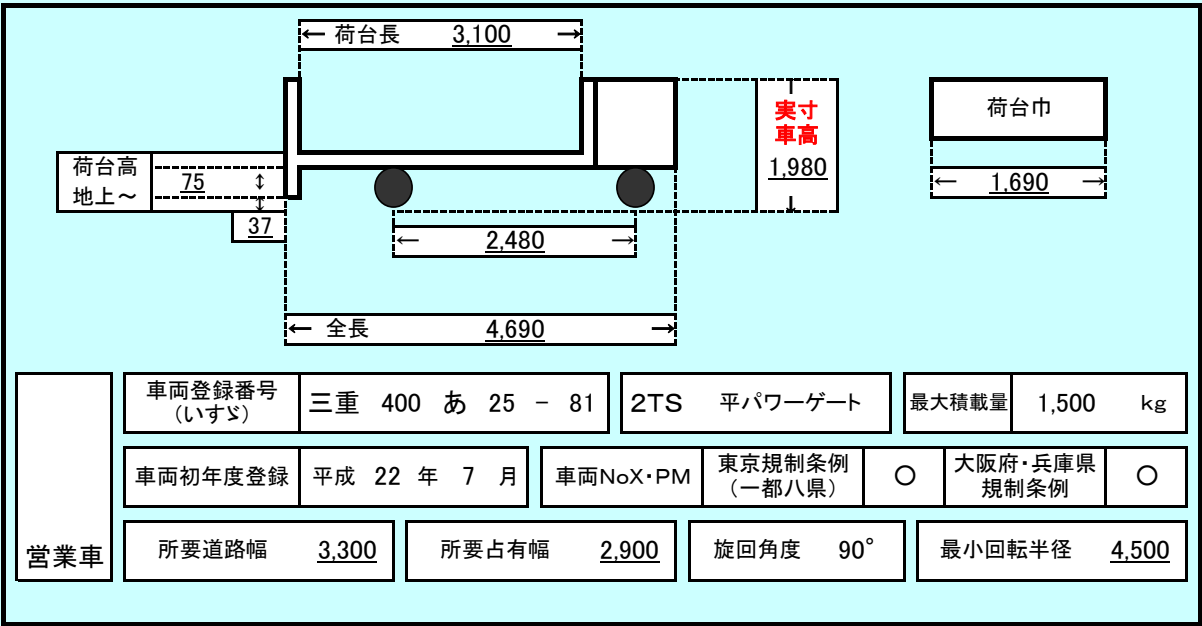
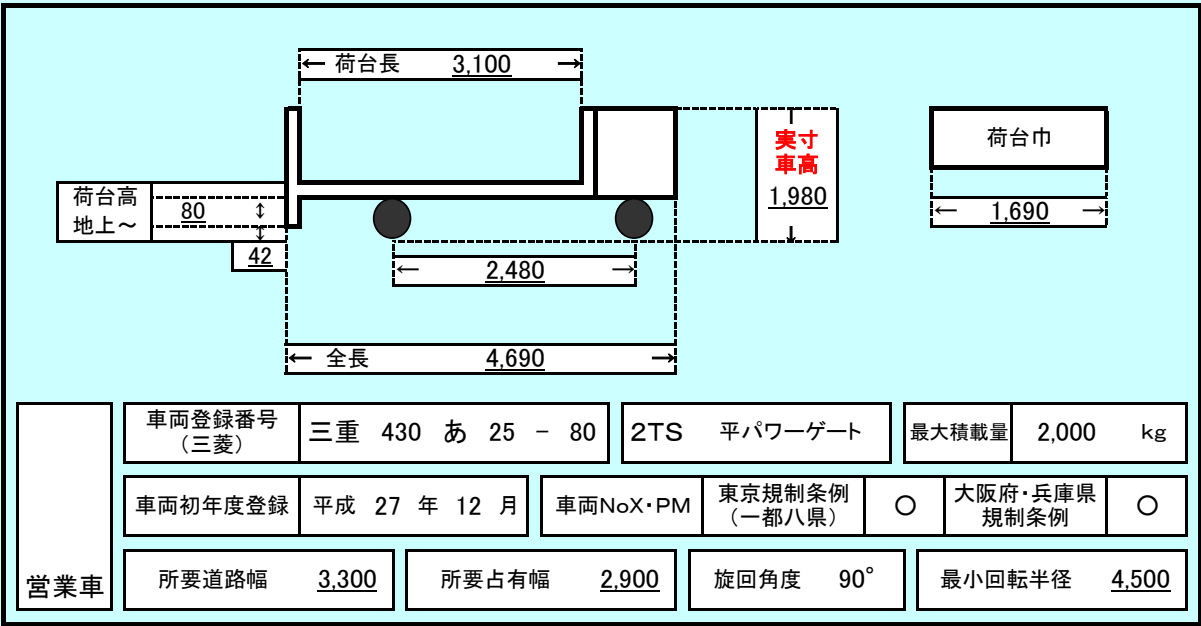
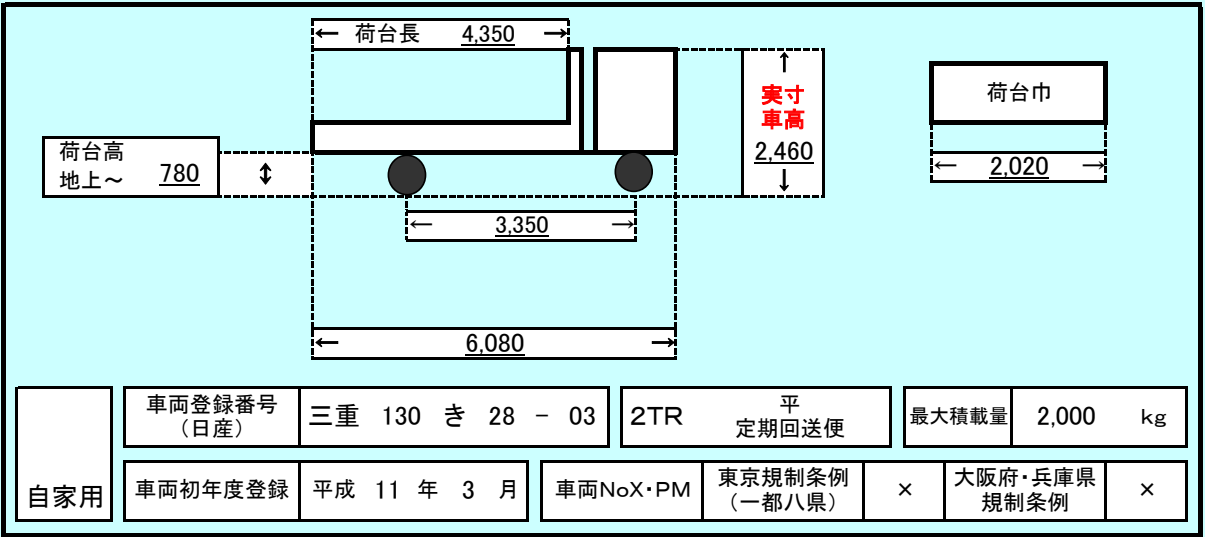
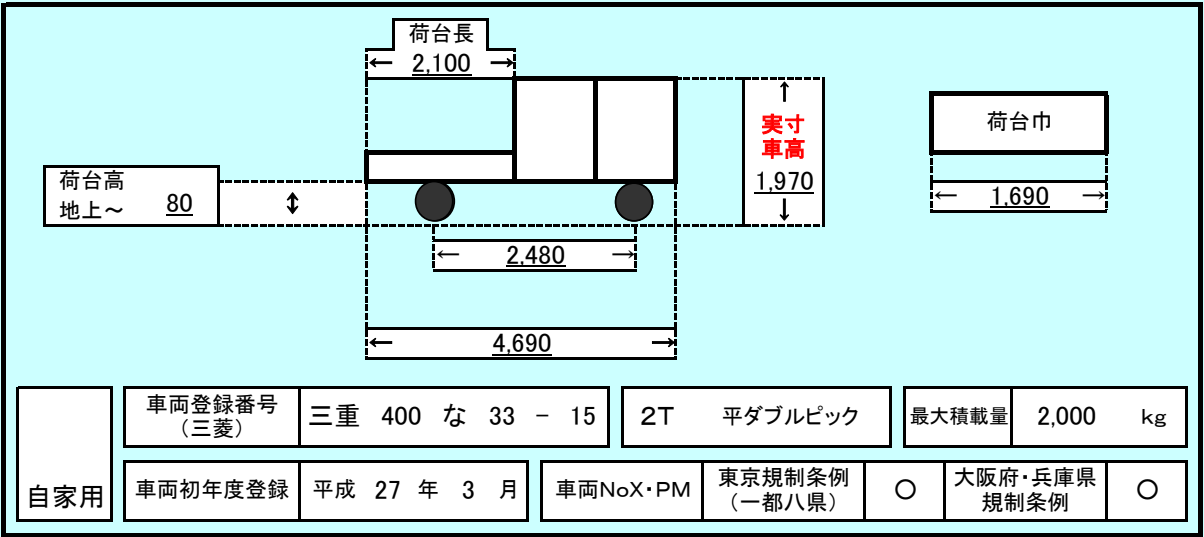
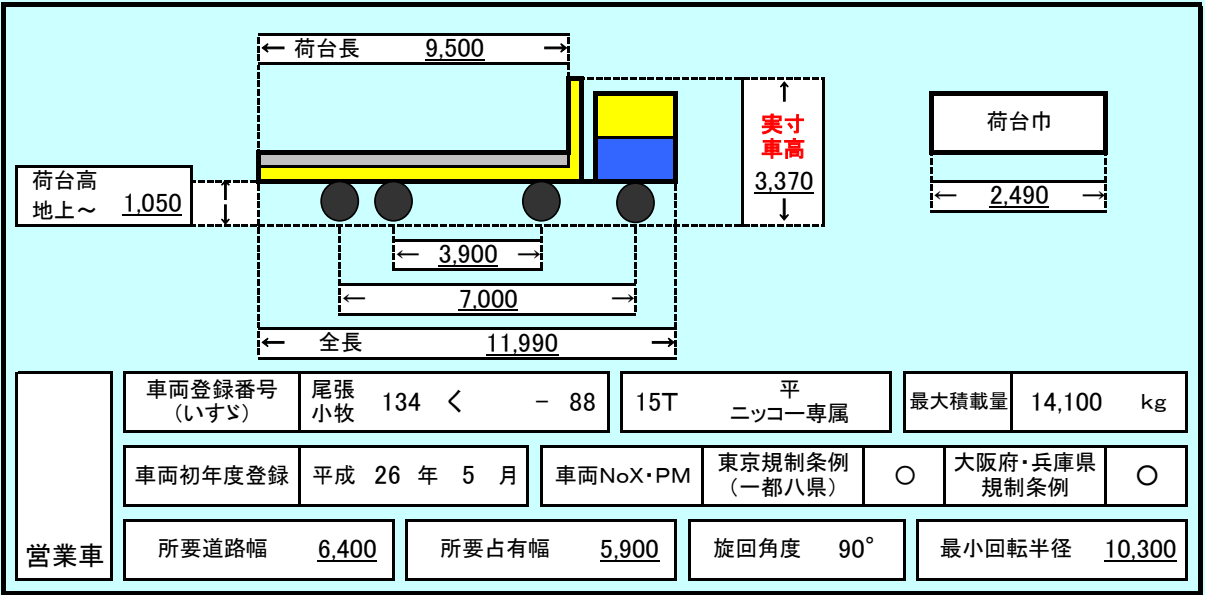
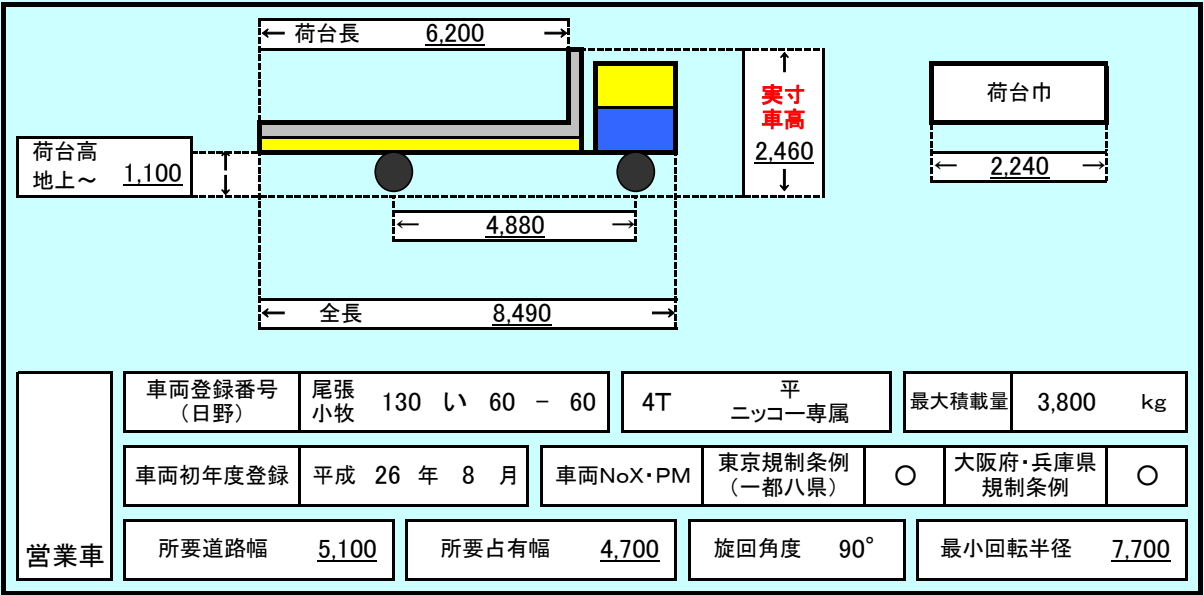
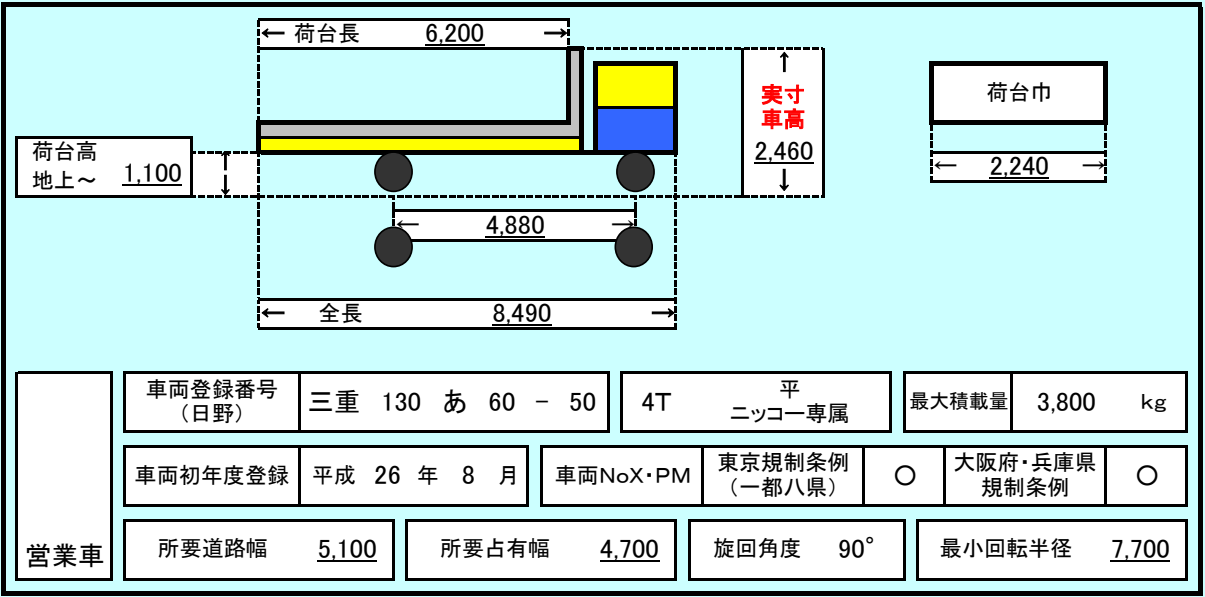
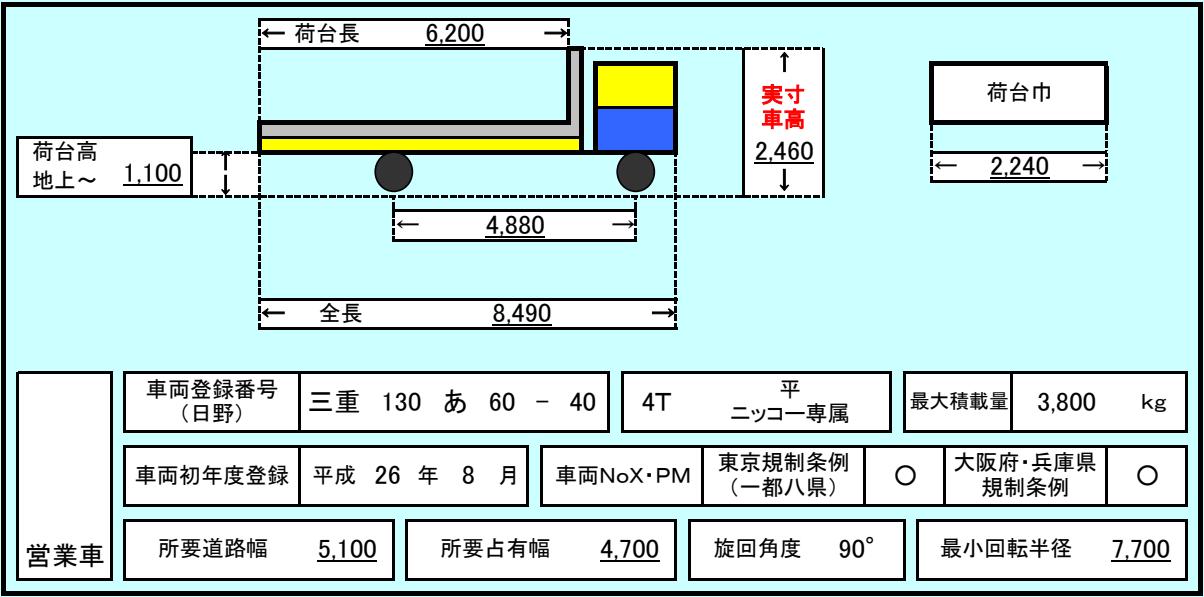


株式会社 プライド物流 車両概要 一覧表 (2022.7.1現在)




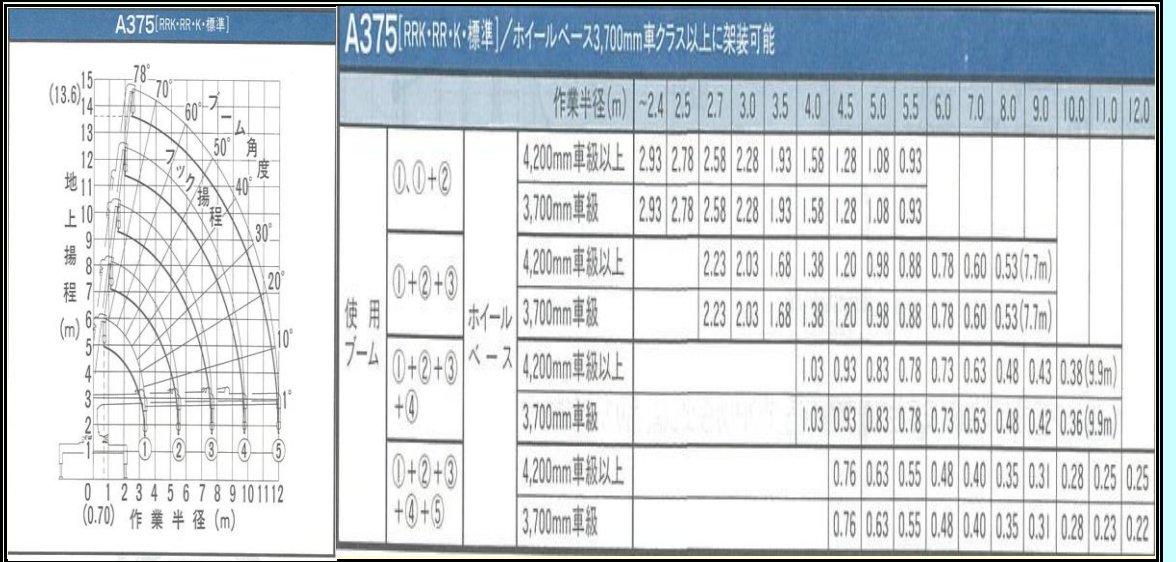




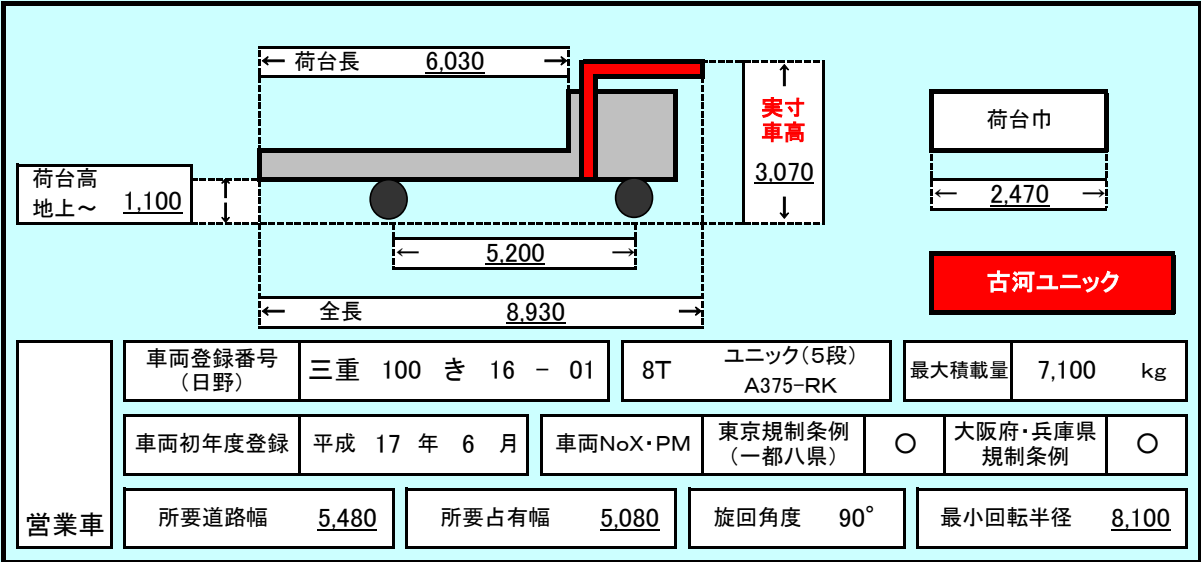


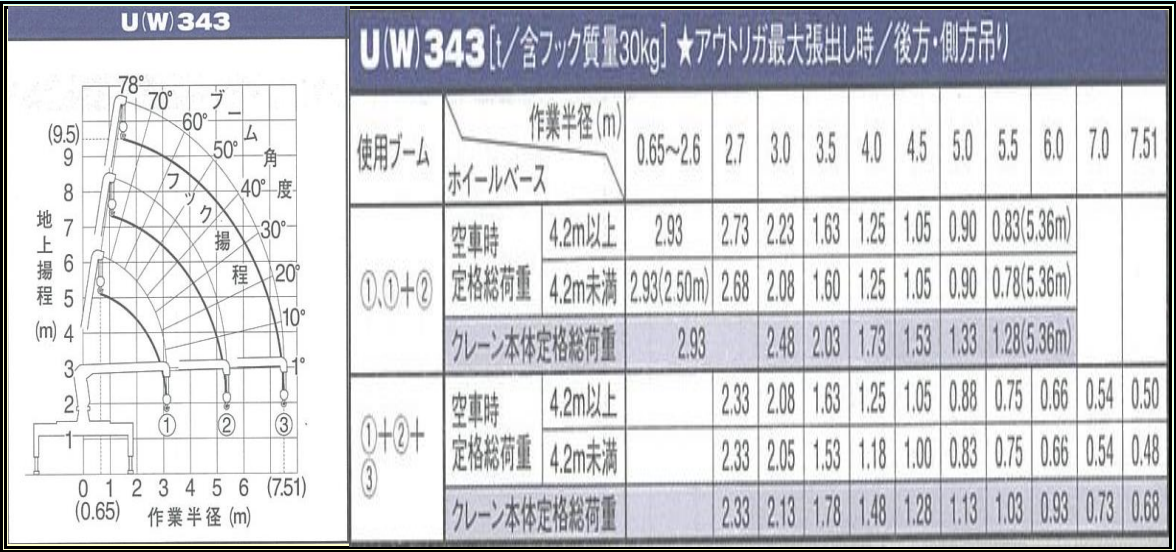






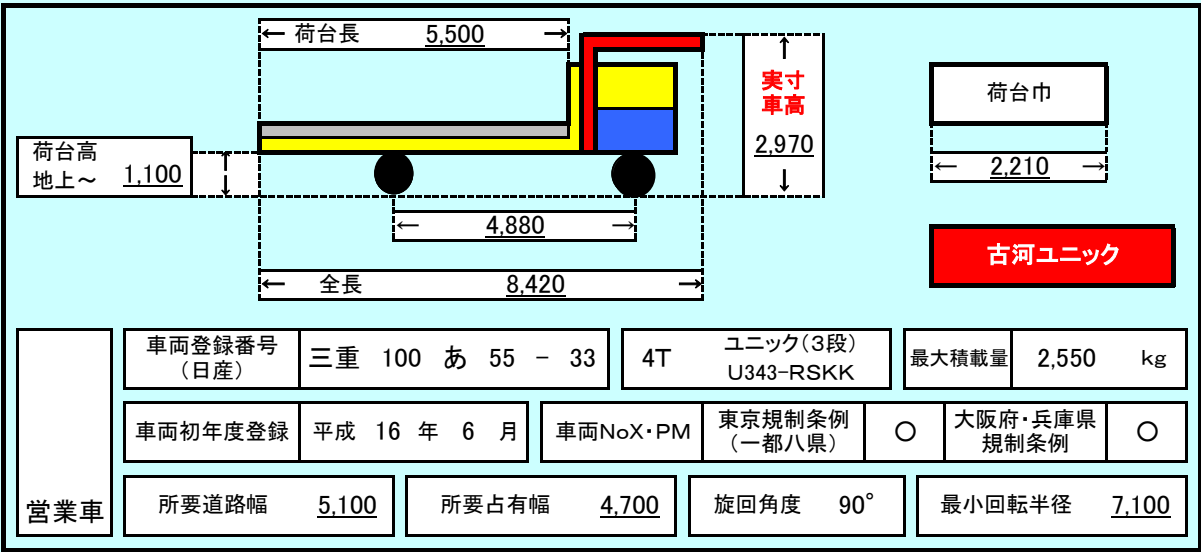









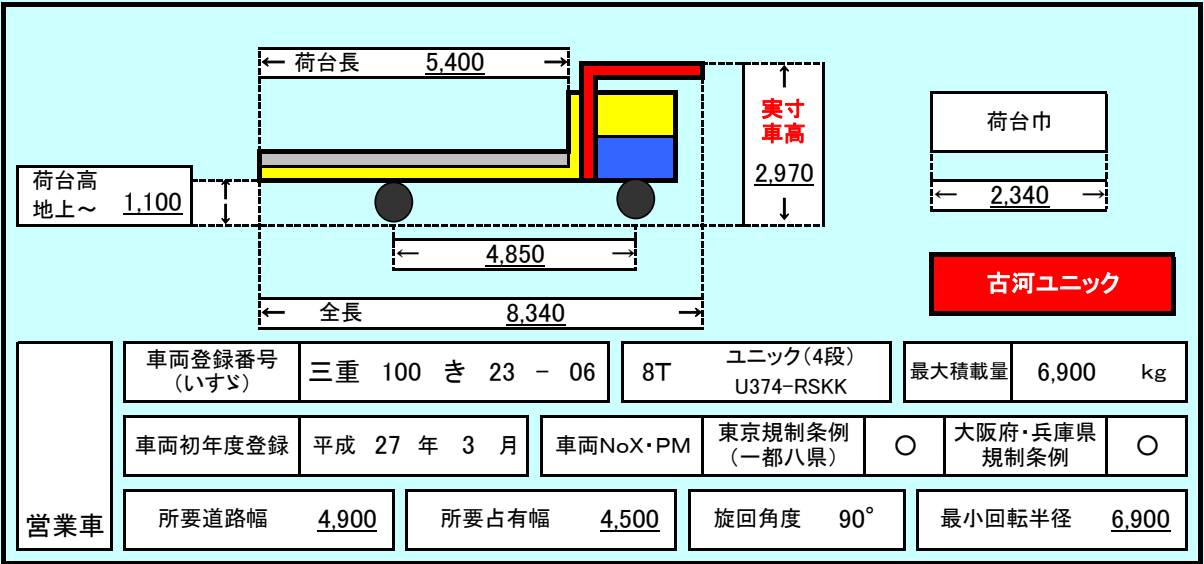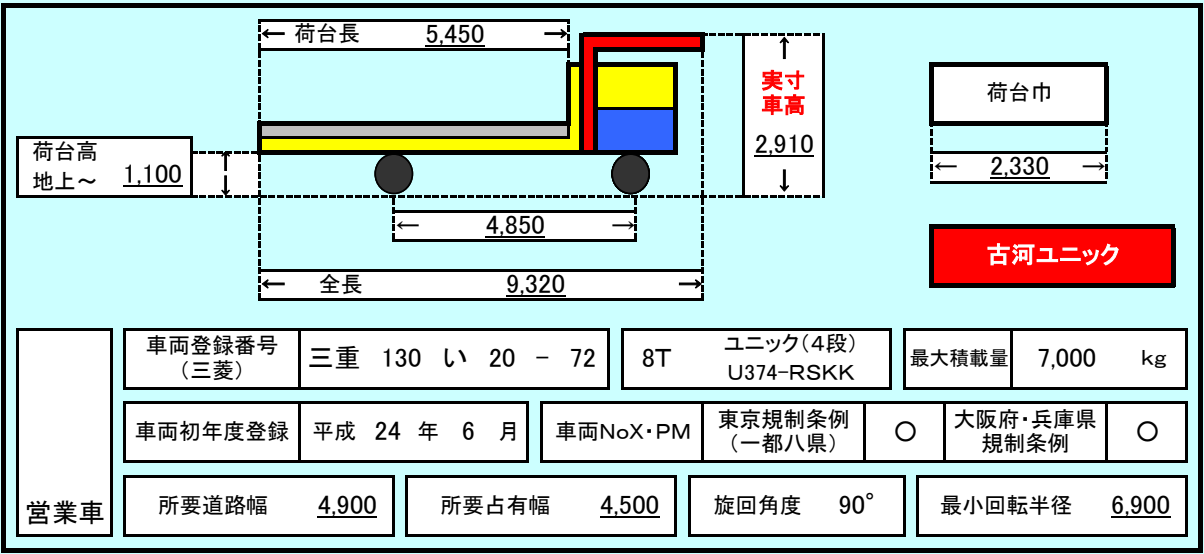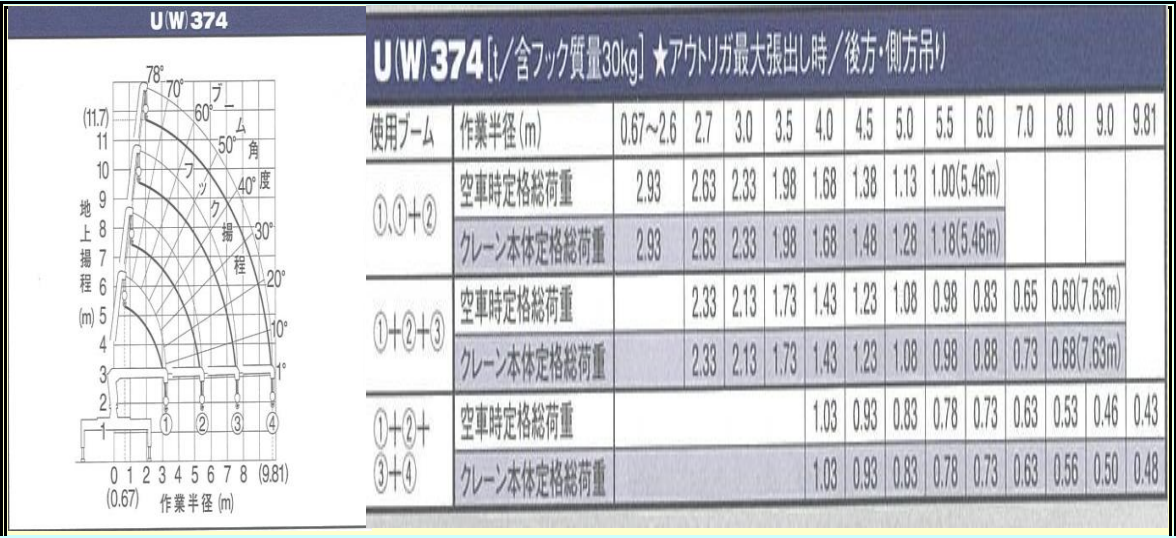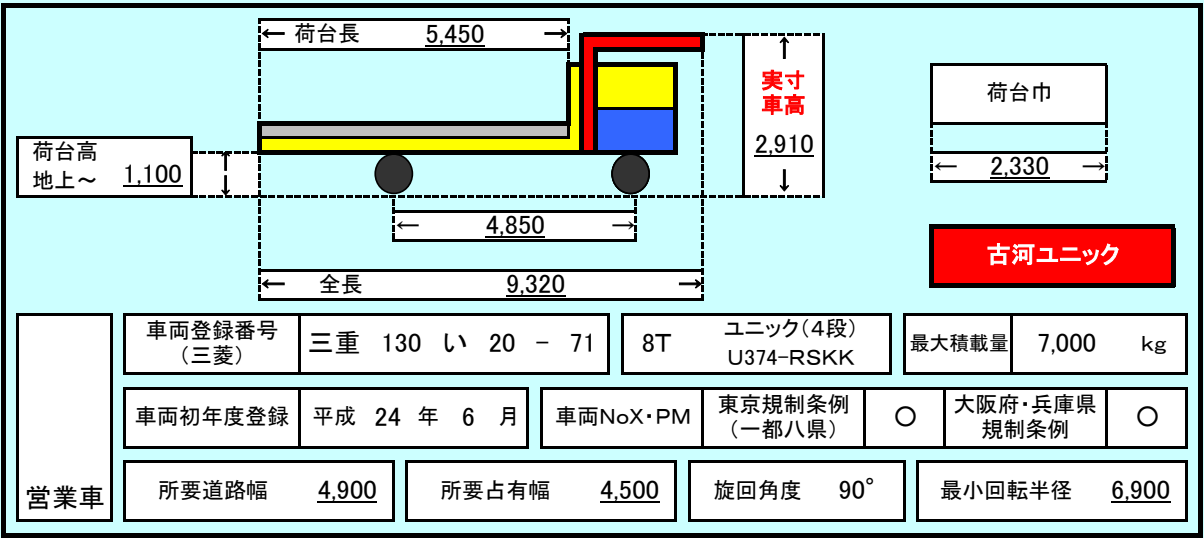


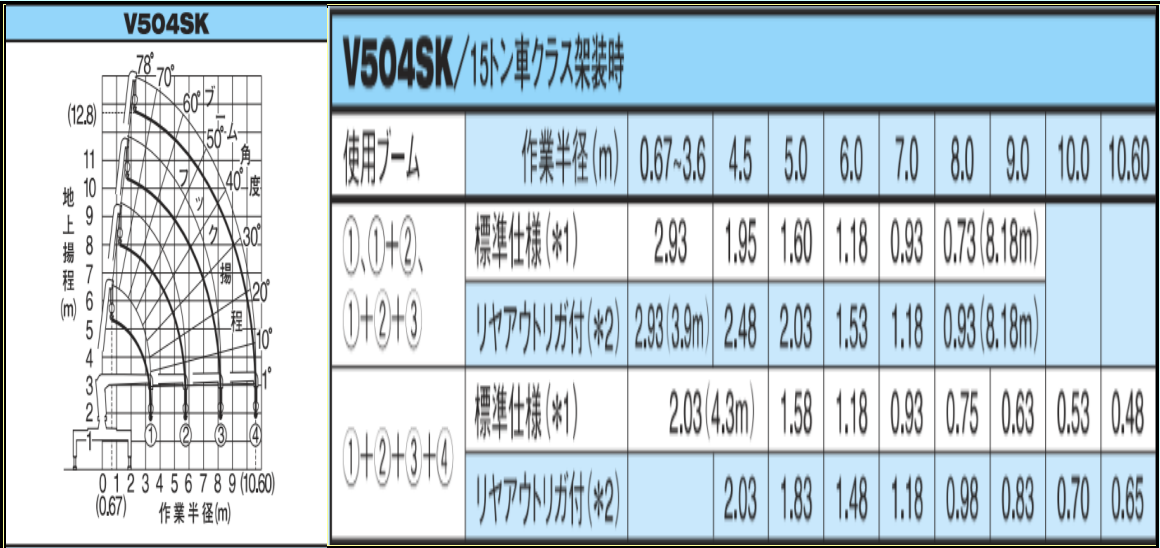
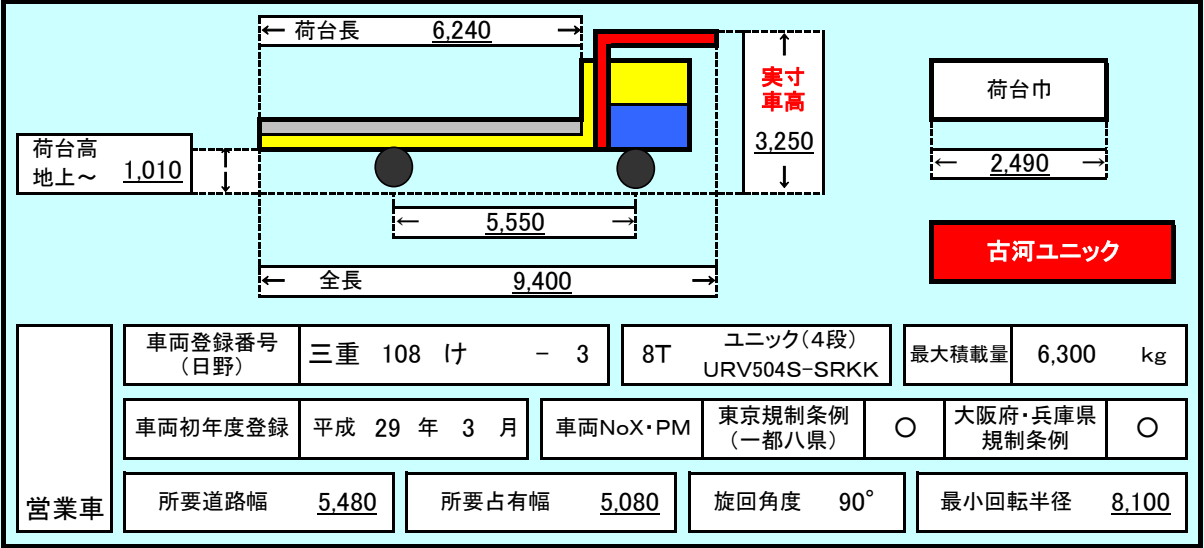
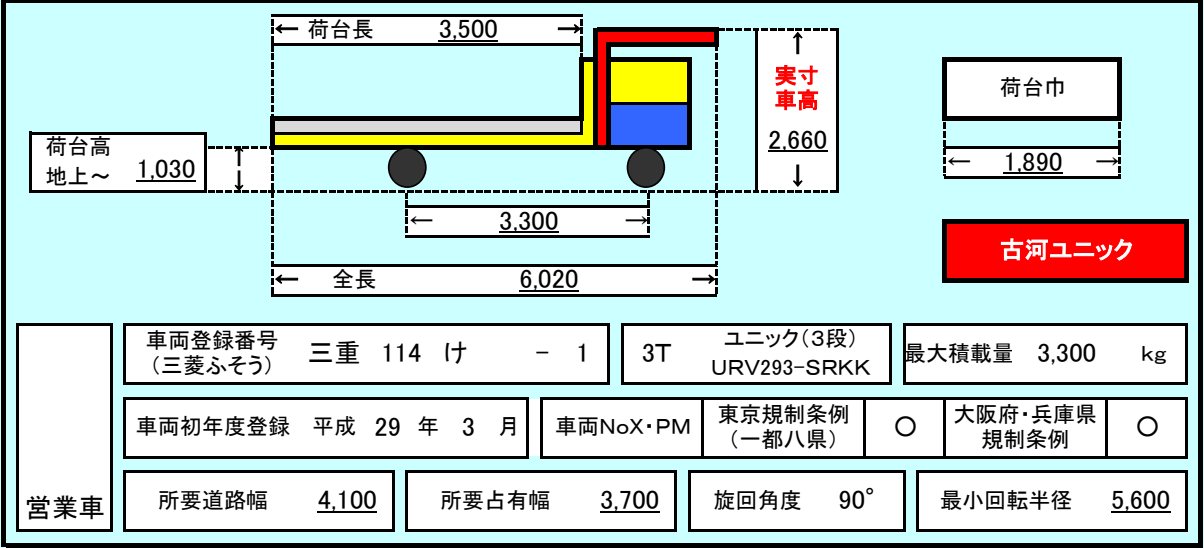








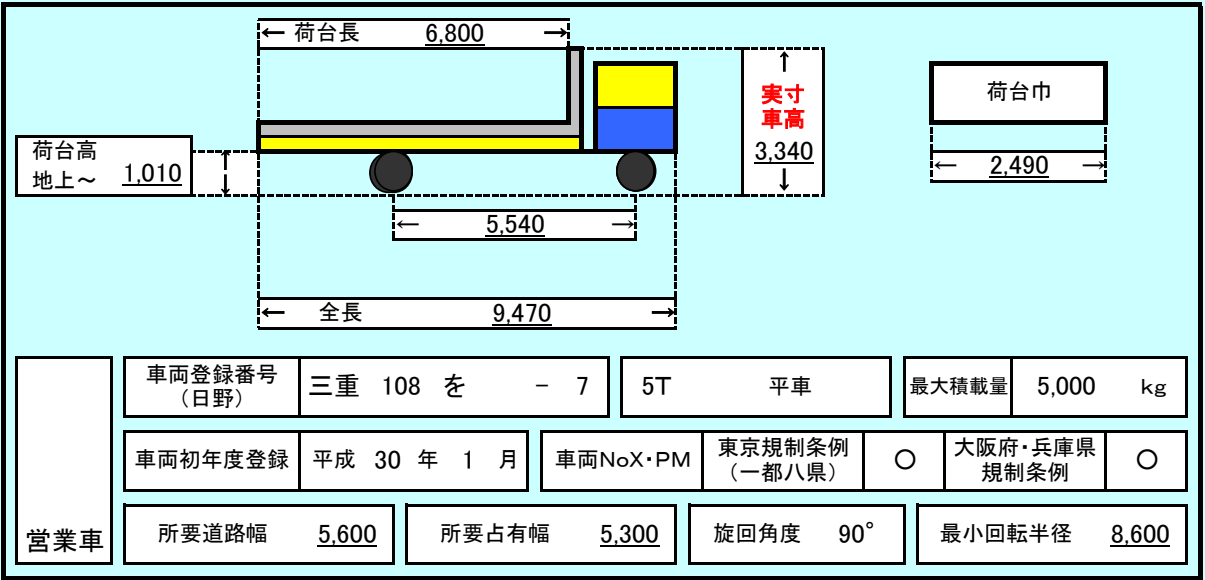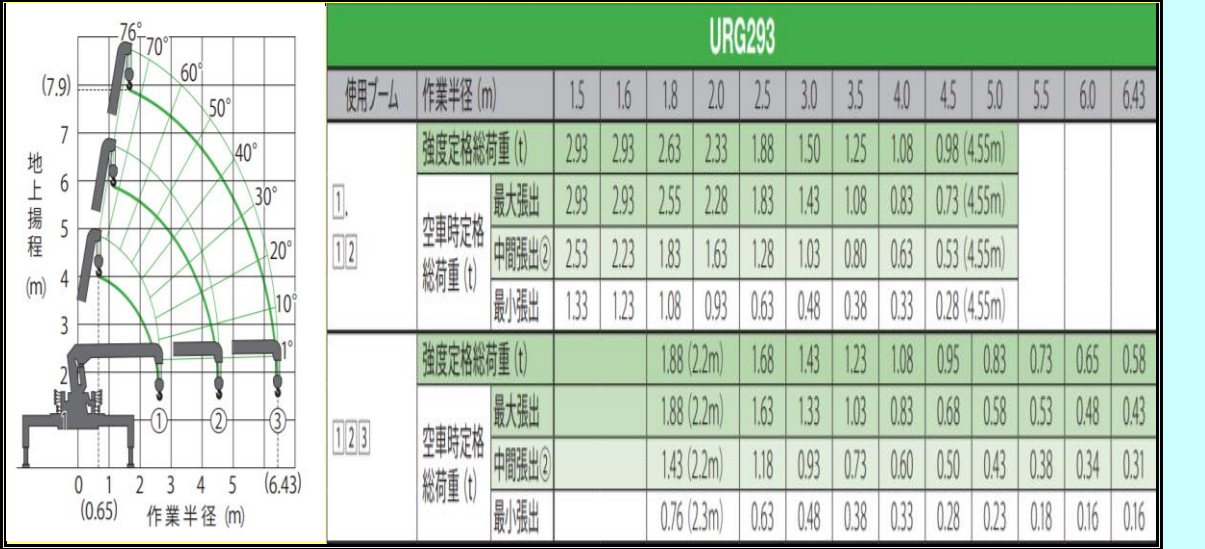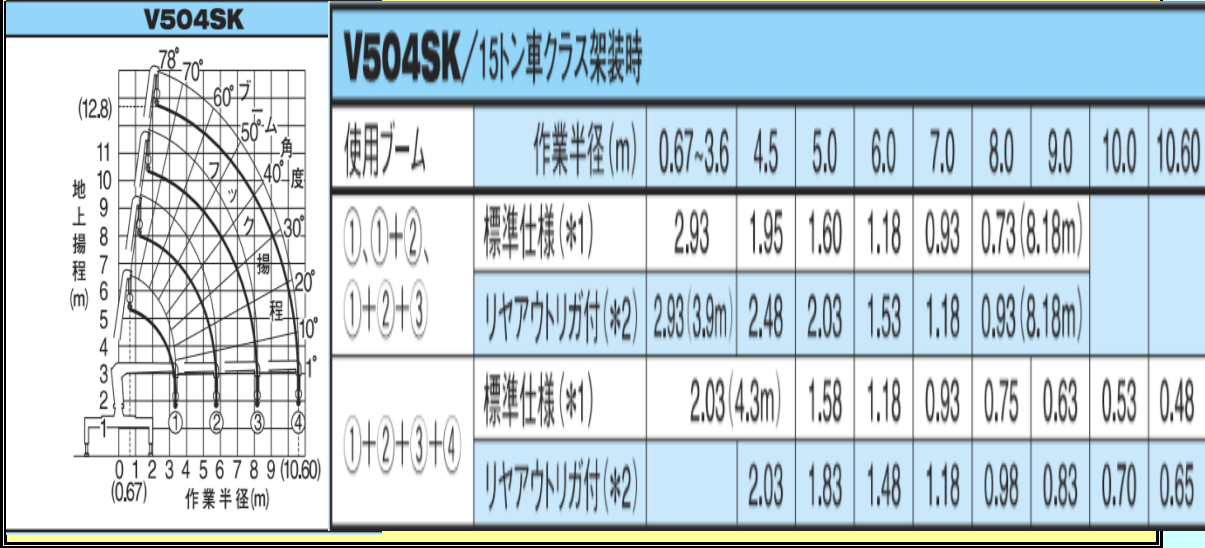
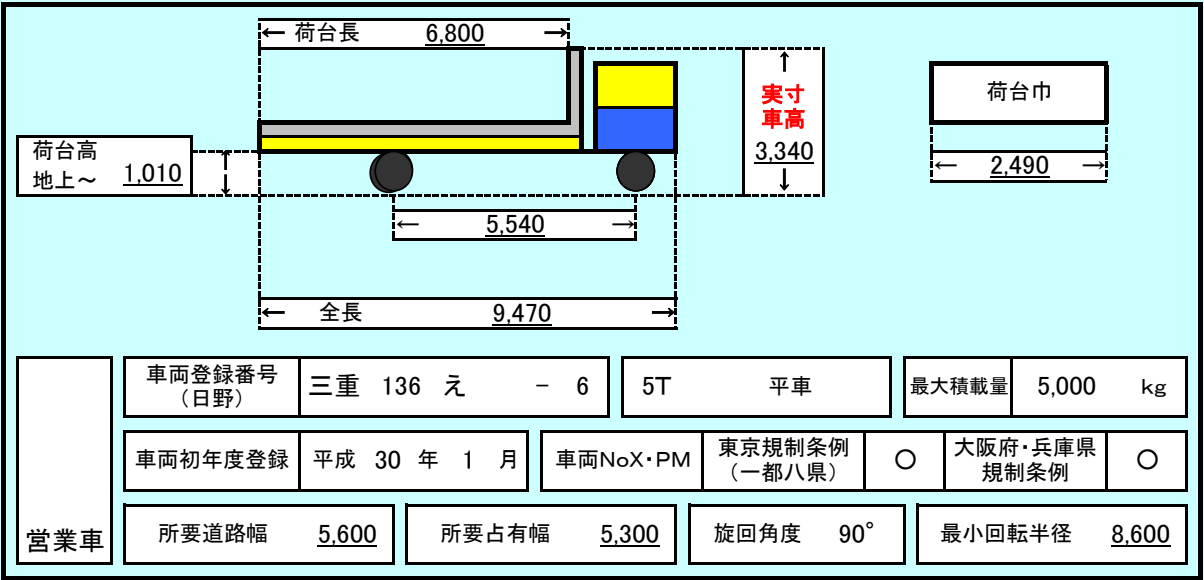
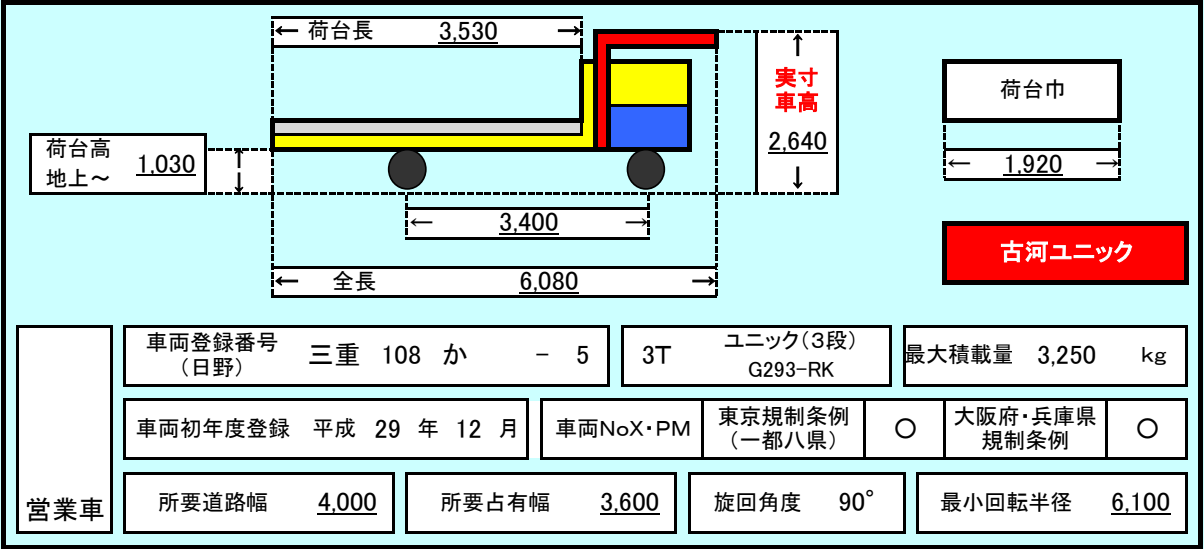
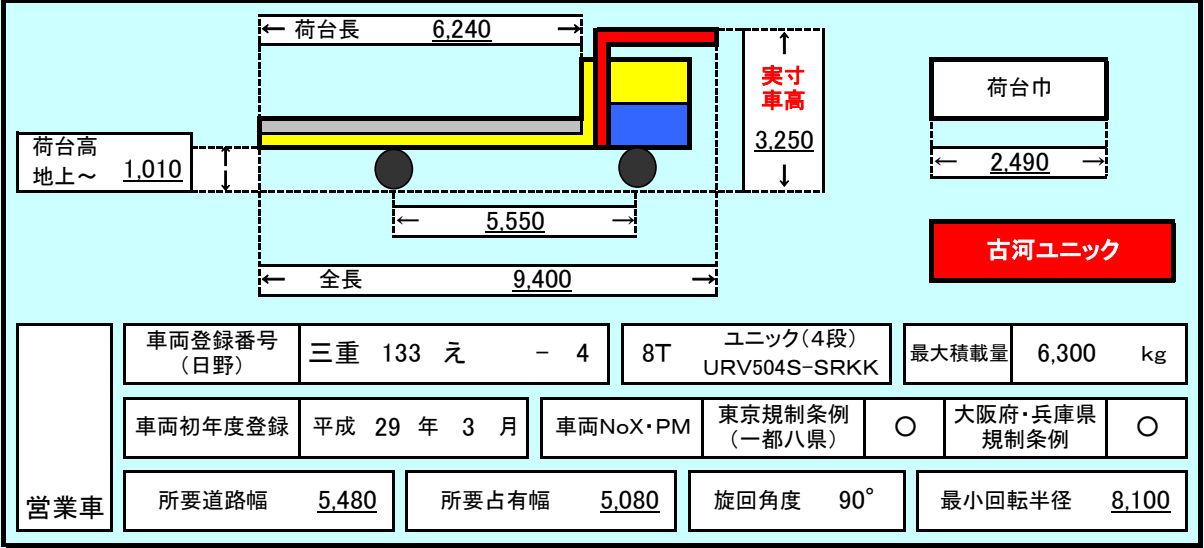


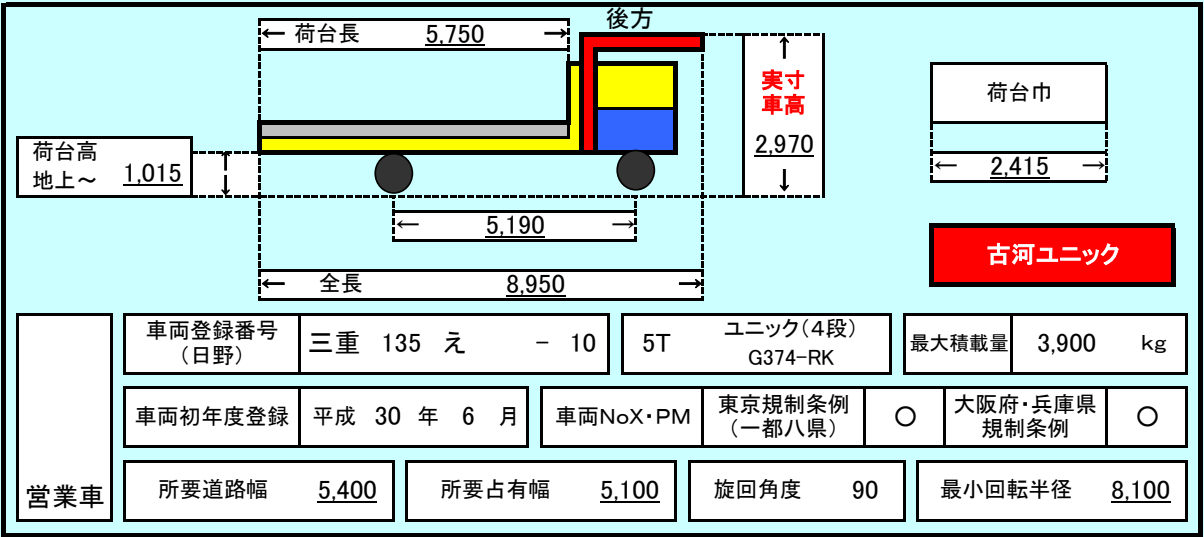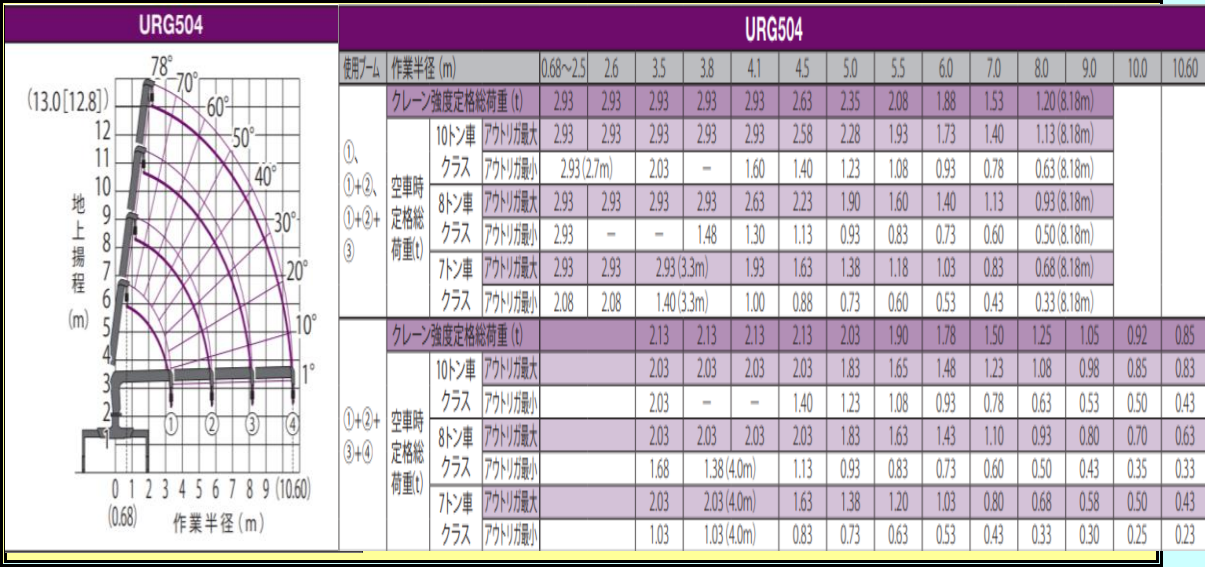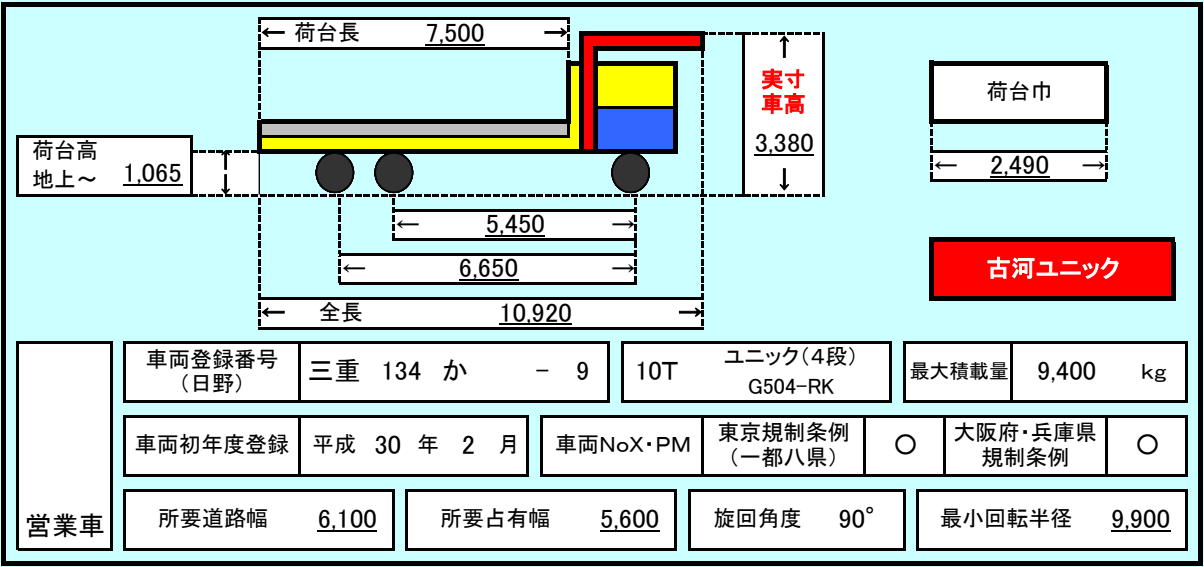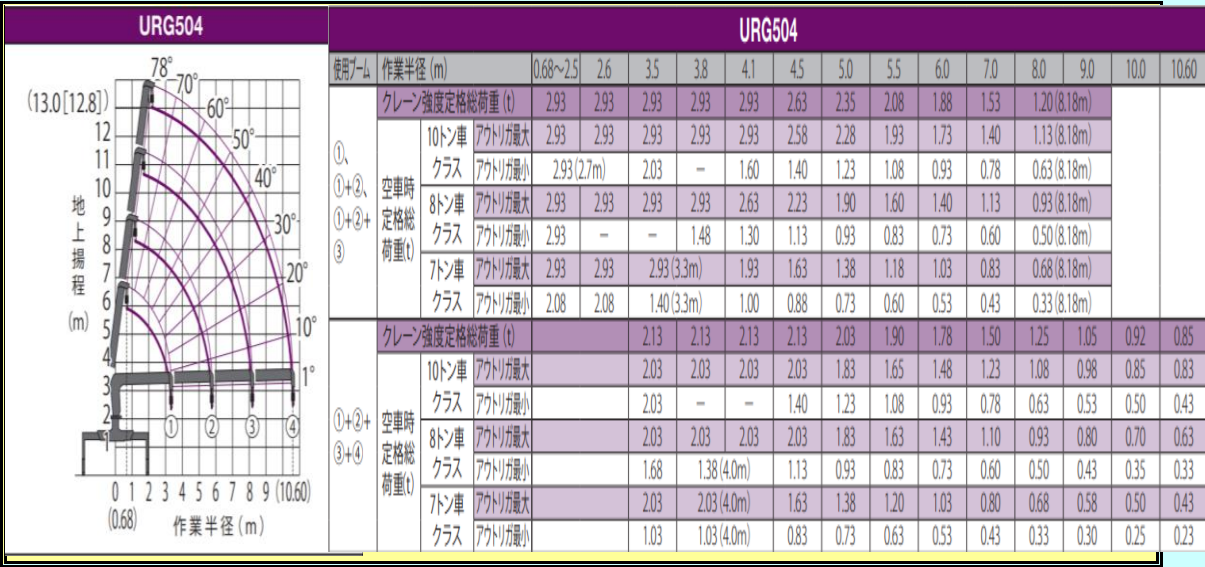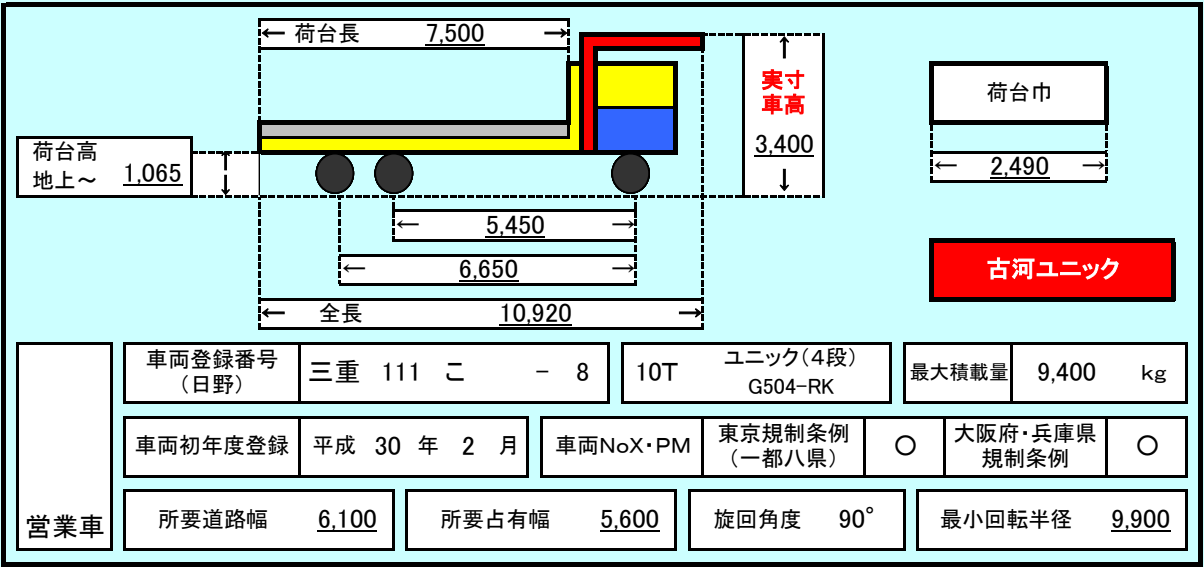



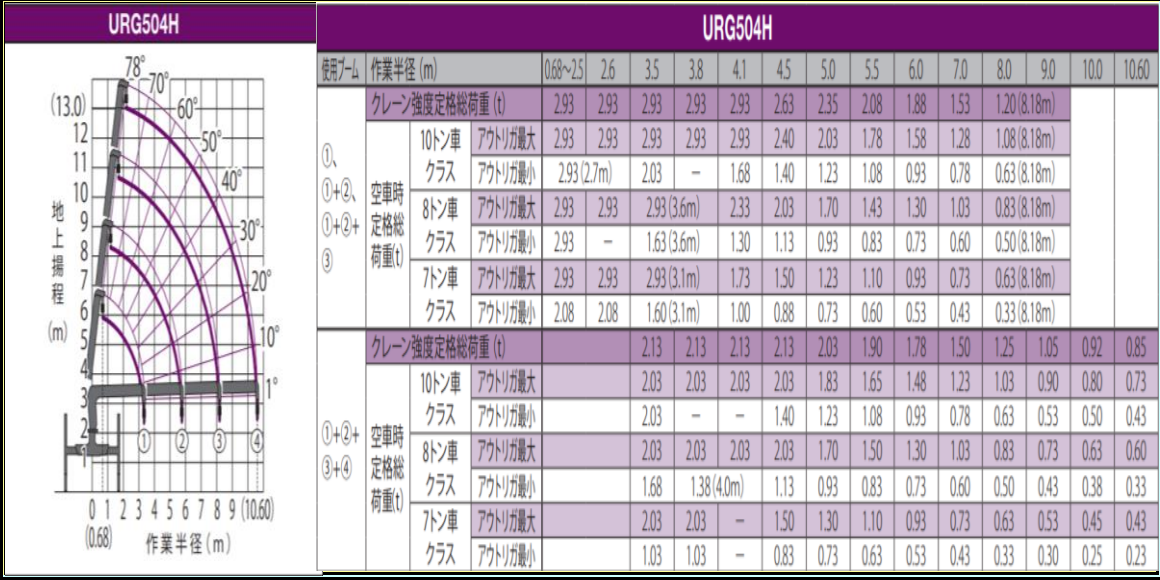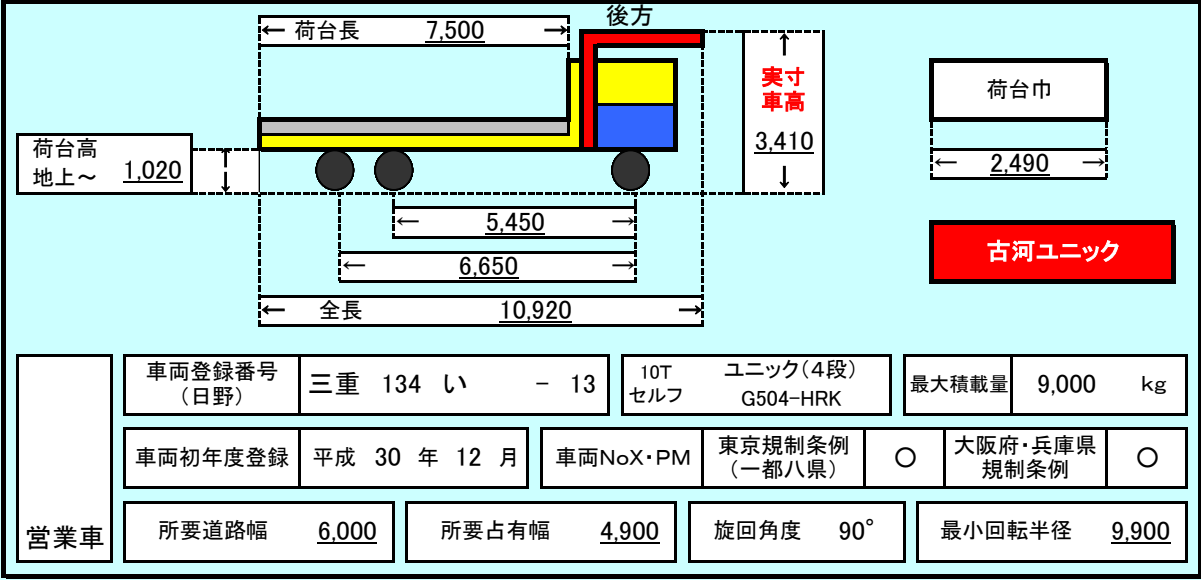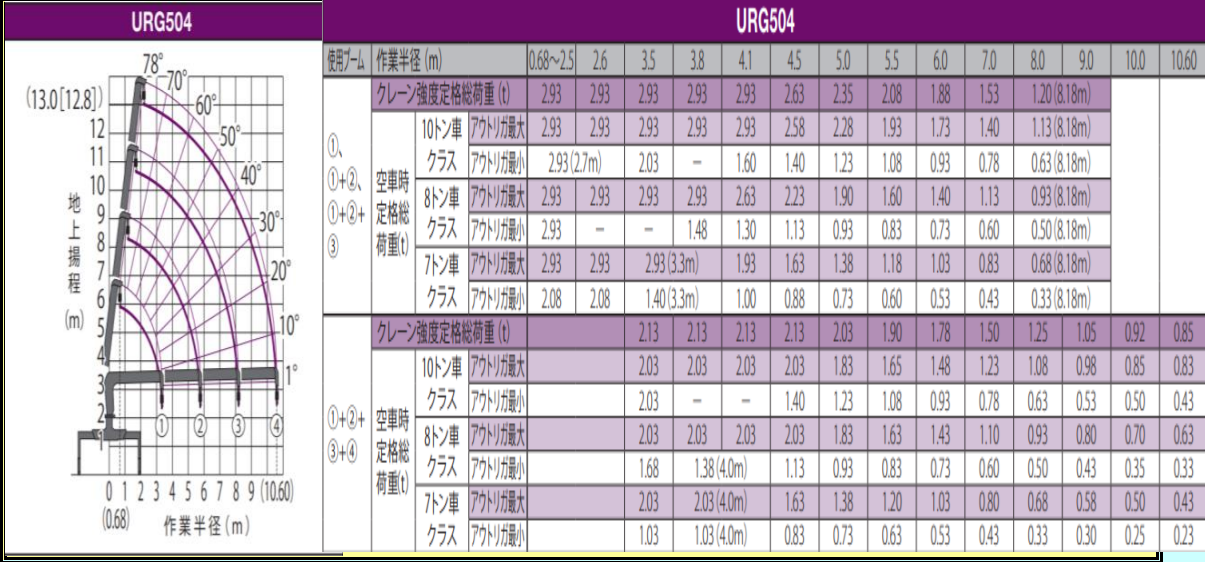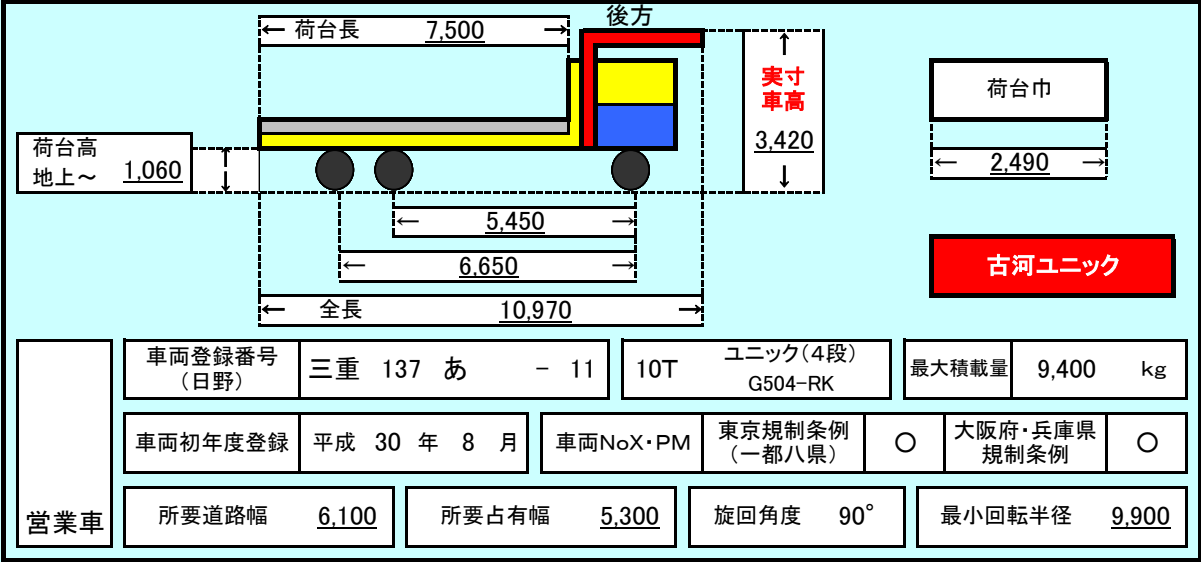


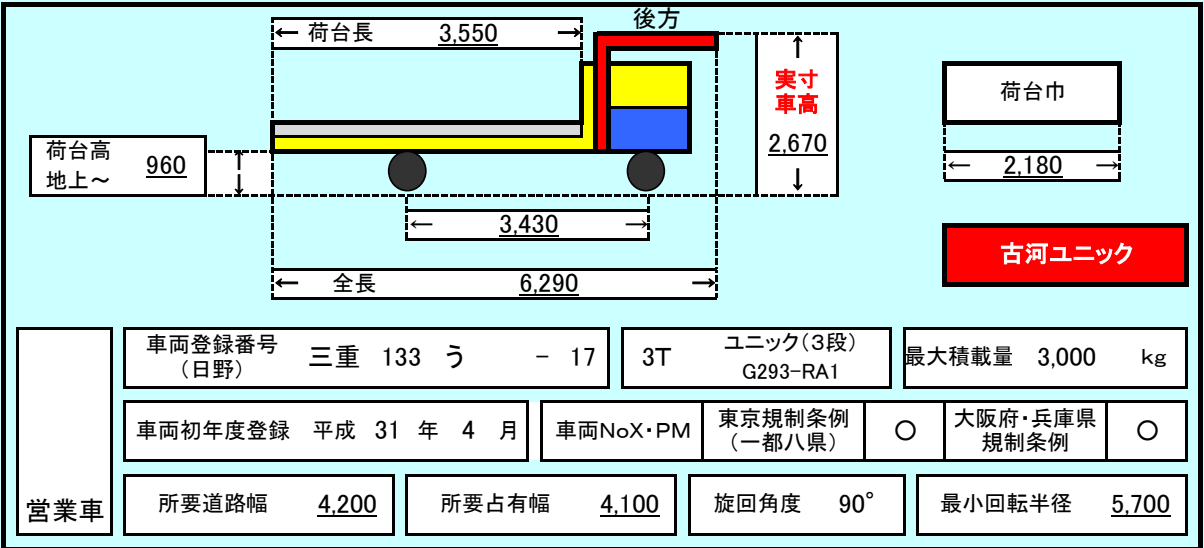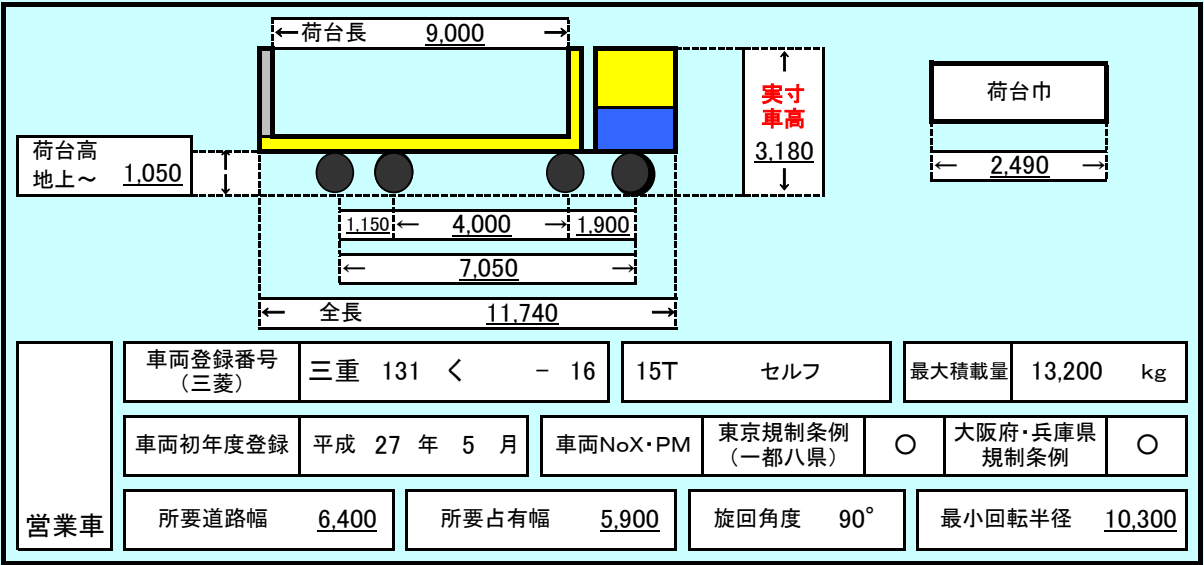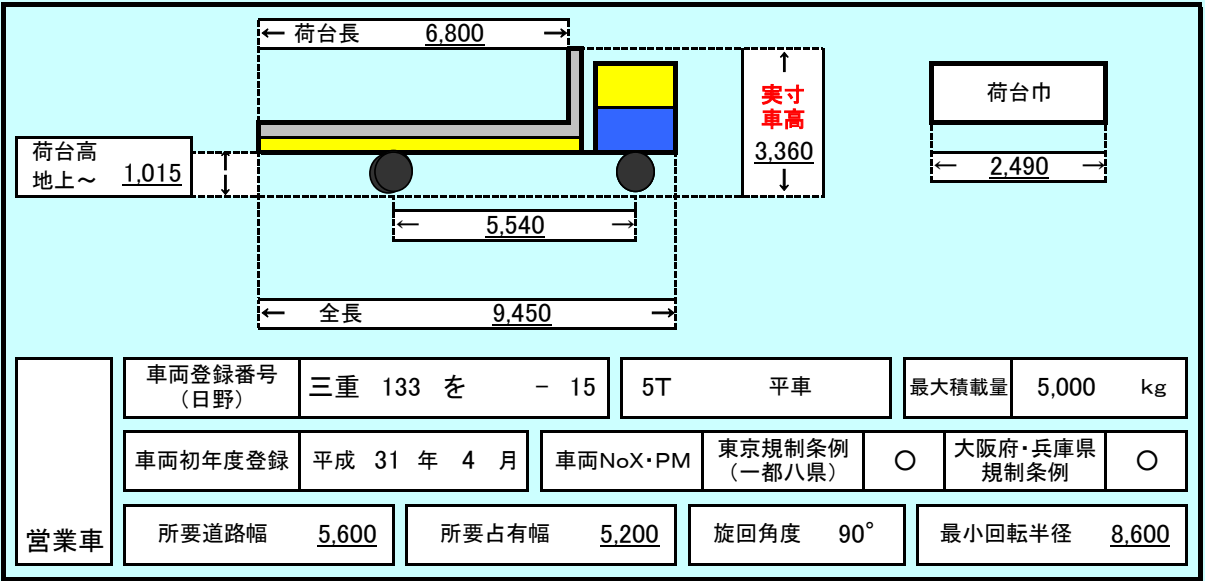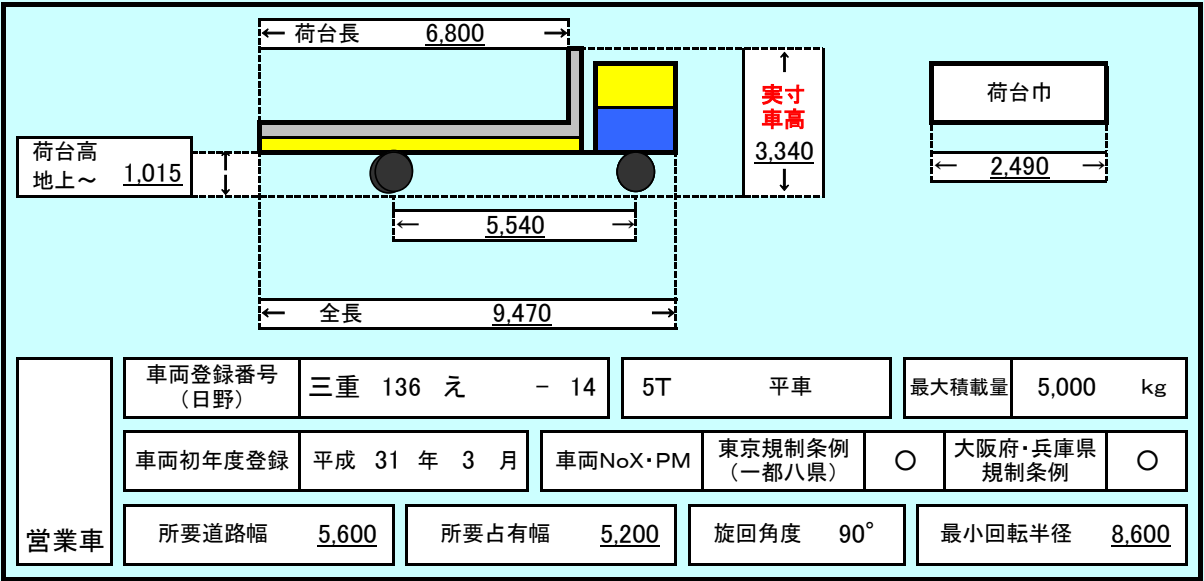

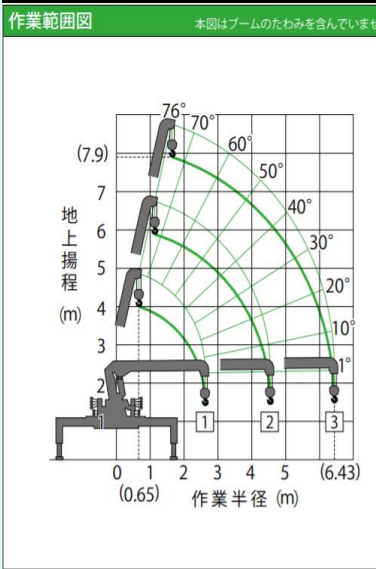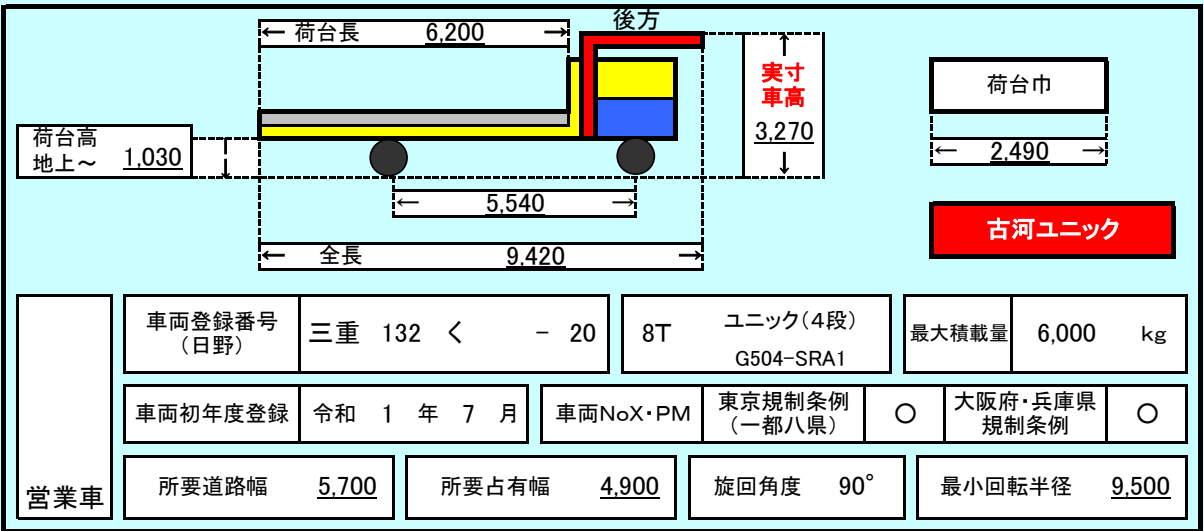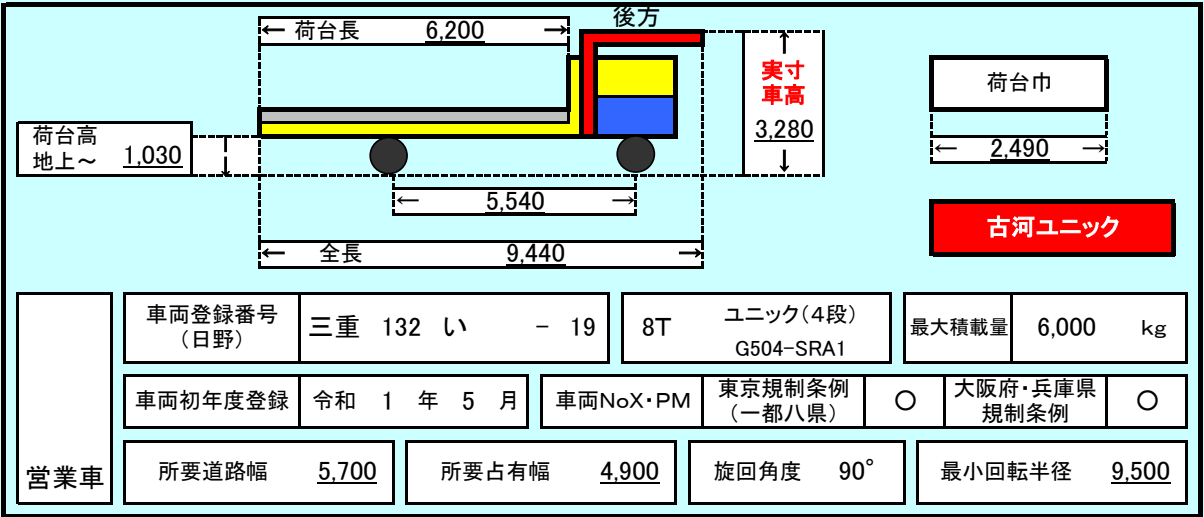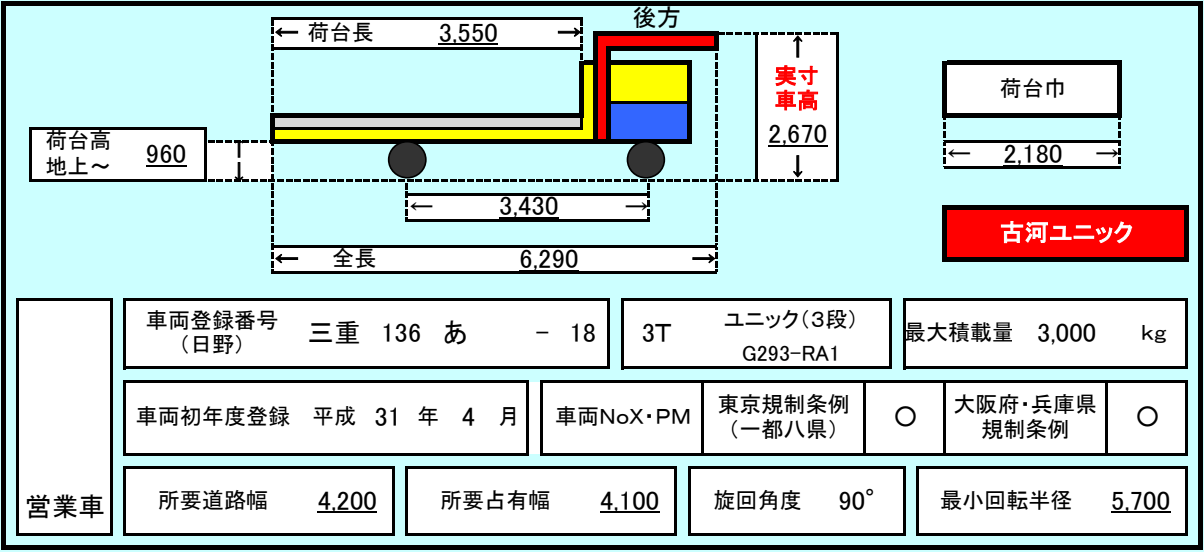


定格総荷重表

| 使用ブーム       | 作業半径 (m)         |      | ～1.5 | 1.6  | 1.8  | 2.0  | 2.2  | 2.3  | 2.5  | 3.0  | 3.5  | 4.0  | 4.55 | 前方領域          |
|-------------|------------------|------|------|------|------|------|------|------|------|------|------|------|------|---------------|
| 1           | 空車時<br>定格総荷重 (t) | 最大性能 | 2.93 | 2.93 | 2.55 | 2.28 | 2.10 | 2.00 | 1.83 | 1.43 | 1.08 | 0.83 | 0.73 | 空車時定格の<br>25% |
|             |                  | 中間性能 | 2.53 | 2.23 | 1.83 | 1.63 | 1.49 | 1.41 | 1.28 | 1.03 | 0.80 | 0.63 | 0.53 |               |
|             |                  | 最小性能 | 1.33 | 1.23 | 1.08 | 0.93 | 0.81 | 0.75 | 0.63 | 0.48 | 0.38 | 0.33 | 0.28 |               |
| 強度定格総荷重 (t) | 2.93             | 2.93 | 2.63 | 2.33 | 2.15 | 2.06 | 1.88 | 1.50 | 1.25 | 1.08 | 0.98 |      |      |               |
| 使用ブーム       | 作業半径 (m)         |      | ～2.2 | 2.3  | 2.5  | 3.0  | 3.5  | 4.0  | 4.5  | 5.0  | 5.5  | 6.0  | 6.43 |               |
| 1<br>2<br>3 | 空車時<br>定格総荷重 (t) | 最大性能 | 1.88 | 1.78 | 1.63 | 1.33 | 1.03 | 0.83 | 0.68 | 0.58 | 0.53 | 0.48 | 0.43 | 空車時定格の<br>25% |
|             |                  | 中間性能 | 1.43 | 1.33 | 1.18 | 0.93 | 0.73 | 0.60 | 0.50 | 0.43 | 0.38 | 0.34 | 0.31 |               |
|             |                  | 最小性能 | 0.76 | 0.76 | 0.63 | 0.48 | 0.38 | 0.33 | 0.28 | 0.23 | 0.18 | 0.16 | 0.16 |               |
| 強度定格総荷重 (t) | 1.88             | 1.81 | 1.68 | 1.43 | 1.23 | 1.08 | 0.95 | 0.83 | 0.73 | 0.65 | 0.58 |      |      |               |

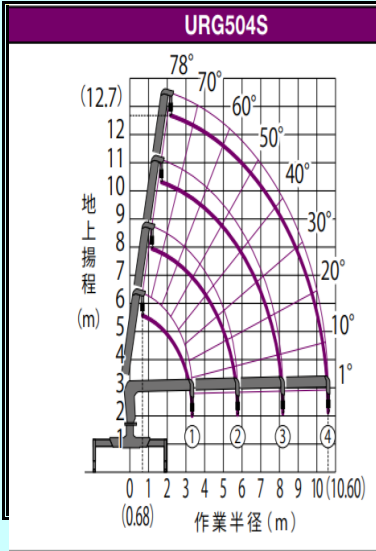

| URG504S          |                  |                                                                              |         |             |             |             |      |             |      |              |              |              |              |  | ※リヤアクトリガ付:リヤアクトリガが最大突出以外の場合は、最小突出の性能で作業してください。 |      |             |             |             |             |      |      |      |              |      |
|------------------|------------------|------------------------------------------------------------------------------|---------|-------------|-------------|-------------|------|-------------|------|--------------|--------------|--------------|--------------|--|------------------------------------------------|------|-------------|-------------|-------------|-------------|------|------|------|--------------|------|
| 使用ブーム            | 作業半径 (m)         | 0.68~1.9   2.3   2.5   3.0   3.6   4.0   5.0   6.0   7.0   8.0   9.0   10.60 |         |             |             |             |      |             |      |              |              |              |              |  |                                                |      |             |             |             |             |      |      |      |              |      |
| 1.<br>12.<br>123 | 強度定格総荷重 (t)      |                                                                              |         |             |             |             |      |             |      |              |              |              |              |  |                                                | 2.93 | 2.93        | 2.93        | 2.93        | 2.93 (3.9m) | 2.03 | 1.53 | 1.18 | 0.93 (8.18m) |      |
|                  | 7トン車クラス          | リヤアクトリガ無し (標準仕様)                                                             | アクトリガ最大 | 2.93        | 2.93        | 2.93        | 2.93 | 2.93        | 2.43 | 1.60         | 1.18         | 0.93         | 0.73 (8.18m) |  |                                                |      |             |             |             |             |      |      |      |              |      |
|                  |                  | アクトリガ最小                                                                      | 2.08    | 2.08        | 2.08        | 1.53        | 1.13 | 0.95        | 0.65 | 0.48         | 0.38         | 0.28 (8.18m) |              |  |                                                |      |             |             |             |             |      |      |      |              |      |
|                  | 5.5トン車クラス        | リヤアクトリガ付                                                                     | アクトリガ最大 | 2.93        | 2.93        | 2.93        | 2.93 | 2.93 (3.9m) | 2.03 | 1.53         | 1.18         | 0.93 (8.18m) |              |  |                                                |      |             |             |             |             |      |      |      |              |      |
|                  |                  | アクトリガ最小                                                                      | 2.93    | 2.93        | 1.98 (2.8m) | 1.33        | —    | 0.80        | 0.60 | 0.50         | 0.35 (8.18m) |              |              |  |                                                |      |             |             |             |             |      |      |      |              |      |
|                  | リヤアクトリガ無し (標準仕様) | アクトリガ最大                                                                      | 2.93    | 2.93        | 2.93        | 2.93 (3.1m) | 1.83 | 1.20        | 0.88 | 0.68         | 0.53 (8.18m) |              |              |  |                                                |      |             |             |             |             |      |      |      |              |      |
|                  |                  | アクトリガ最小                                                                      | 2.08    | 2.08 (2.2m) | 1.05 (3.1m) | 0.70        | 0.45 | 0.33        | 0.25 | 0.20 (8.18m) |              |              |              |  |                                                |      |             |             |             |             |      |      |      |              |      |
|                  | リヤアクトリガ付         | アクトリガ最大                                                                      | 2.93    | 2.93        | 2.93        | 2.93        | 2.93 | 2.35        | 1.53 | 1.13         | 0.88         | 0.68 (8.18m) |              |  |                                                |      |             |             |             |             |      |      |      |              |      |
|                  |                  | アクトリガ最小                                                                      | 2.93    | —           | 1.53 (2.8m) | 0.98        | 0.83 | 0.55        | 0.40 | 0.30         | 0.25 (8.18m) |              |              |  |                                                |      |             |             |             |             |      |      |      |              |      |
|                  | 1234             | 強度定格総荷重 (t)                                                                  |         |             |             |             |      |             |      |              |              |              |              |  |                                                |      | 2.03        | 2.03 (4.5m) | 1.83        | 1.48        | 1.18 | 0.98 | 0.83 | 0.65         |      |
| 7トン車クラス          |                  | リヤアクトリガ無し (標準仕様)                                                             | アクトリガ最大 |             |             |             |      |             |      |              |              |              |              |  |                                                |      |             | 2.03        | 2.03 (4.3m) | 1.58        | 1.18 | 0.93 | 0.75 | 0.63         | 0.48 |
|                  |                  | アクトリガ最小                                                                      |         |             |             |             |      |             |      |              |              |              |              |  |                                                |      | 1.03        | 1.03 (3.7m) | 0.60        | 0.43        | 0.35 | 0.28 | 0.25 | 0.18         |      |
| リヤアクトリガ付         |                  | アクトリガ最大                                                                      |         |             |             |             |      |             |      |              |              |              |              |  |                                                |      | 2.03        | 2.03 (4.5m) | 1.83        | 1.48        | 1.18 | 0.98 | 0.83 | 0.65         |      |
|                  |                  | アクトリガ最小                                                                      |         |             |             |             |      |             |      |              |              |              |              |  |                                                |      | 1.38 (3.5m) | —           | 0.80        | 0.60        | 0.50 | 0.38 | 0.33 | 0.25         |      |
| リヤアクトリガ無し (標準仕様) |                  | アクトリガ最大                                                                      |         |             |             |             |      |             |      |              |              |              |              |  |                                                |      | 2.03        | 2.03 (3.7m) | 1.20        | 0.90        | 0.70 | 0.55 | 0.48 | 0.35         |      |
|                  |                  | アクトリガ最小                                                                      |         |             |             |             |      |             |      |              |              |              |              |  |                                                |      | 0.75        | 0.75 (3.7m) | 0.45        | 0.33        | 0.25 | 0.18 | 0.15 | 0.13         |      |
| リヤアクトリガ付         |                  | アクトリガ最大                                                                      |         |             |             |             |      |             |      |              |              |              |              |  |                                                |      | 2.03        | 2.03 (4.3m) | 1.53        | 1.13        | 0.88 | 0.70 | 0.60 | 0.45         |      |
|                  |                  | アクトリガ最小                                                                      |         |             |             |             |      |             |      |              |              |              |              |  |                                                |      | 0.75        | 0.75 (4.3m) | 0.55        | 0.40        | 0.30 | 0.25 | 0.20 | 0.15         |      |



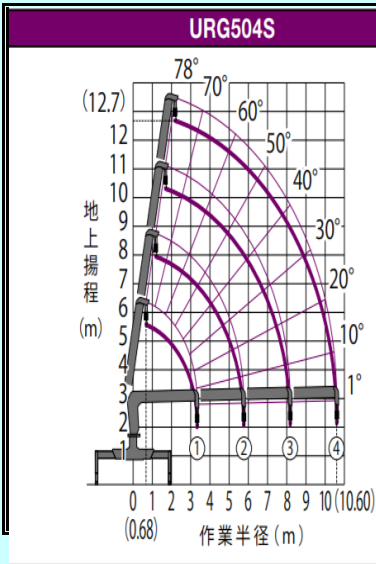







URG504S

※リヤアクトリガ付・リヤアクトリガが最大張出し以外の場合は、最小張出しの性能で作業してください。







| 使用ブーム             | 作業半径 (m)             | 0.68～1.9      | 2.3                  | 2.5         | 3.0                 | 3.6         | 4.0  | 5.0         | 6.0         | 7.0         | 8.0          | 9.0          | 10.60        |              |      |      |      |
|-------------------|----------------------|---------------|----------------------|-------------|---------------------|-------------|------|-------------|-------------|-------------|--------------|--------------|--------------|--------------|------|------|------|
| 1.<br>1/2.<br>1/3 | 空車時<br>定格総<br>荷重 (t) | 7トン車<br>クラス   | リヤアクトリガ無し<br>(標準仕様)  | アクトリガ最大     | 2.93                | 2.93        | 2.93 | 2.93        | 2.93        | 2.43        | 1.60         | 1.18         | 0.93         | 0.73 (8.18m) |      |      |      |
|                   |                      |               | アクトリガ最小              | 2.08        | 2.08                | 2.08        | 1.53 | 1.13        | 0.95        | 0.65        | 0.48         | 0.38         | 0.28 (8.18m) |              |      |      |      |
|                   |                      | リヤアクトリガ付      | アクトリガ最大              | 2.93        | 2.93                | 2.93        | 2.93 | 2.93        | 2.93 (3.9m) | 2.03        | 1.53         | 1.18         | 0.93 (8.18m) |              |      |      |      |
|                   |                      |               | アクトリガ最小              | 2.93        | 2.93                | 1.98 (2.8m) | 1.33 | —           | 0.80        | 0.60        | 0.50         | 0.35 (8.18m) |              |              |      |      |      |
|                   |                      | 5.5トン車<br>クラス | リヤアクトリガ無し<br>(標準仕様)  | アクトリガ最大     | 2.93                | 2.93        | 2.93 | 2.93        | 2.93 (3.1m) | 1.83        | 1.20         | 0.88         | 0.68         | 0.53 (8.18m) |      |      |      |
|                   |                      |               | アクトリガ最小              | 2.08        | 2.08 (2.2m)         | 1.05 (3.1m) | 0.70 | 0.45        | 0.33        | 0.25        | 0.20 (8.18m) |              |              |              |      |      |      |
|                   |                      | リヤアクトリガ付      | アクトリガ最大              | 2.93        | 2.93                | 2.93        | 2.93 | 2.93        | 2.35        | 1.53        | 1.13         | 0.88         | 0.68 (8.18m) |              |      |      |      |
|                   |                      |               | アクトリガ最小              | 2.93        | —                   | 1.53 (2.8m) | 0.98 | 0.83        | 0.55        | 0.40        | 0.30         | 0.25 (8.18m) |              |              |      |      |      |
|                   |                      | 1/2/3/4       | 空車時<br>定格総<br>荷重 (t) | 7トン車<br>クラス | リヤアクトリガ無し<br>(標準仕様) | アクトリガ最大     | 2.03 |             |             |             | 2.03 (4.5m)  | 1.83         | 1.48         | 1.18         | 0.98 | 0.83 | 0.65 |
|                   |                      |               |                      |             | アクトリガ最小             | 2.03        |      |             |             | 2.03 (4.3m) | 1.58         | 1.18         | 0.93         | 0.75         | 0.63 | 0.48 |      |
| リヤアクトリガ付          | アクトリガ最大              |               |                      | 1.03        |                     |             |      | 1.03 (3.7m) | 0.60        | 0.43        | 0.35         | 0.28         | 0.25         | 0.18         |      |      |      |
|                   | アクトリガ最小              |               |                      | 2.03        |                     |             |      | 2.03 (4.5m) | 1.83        | 1.48        | 1.18         | 0.98         | 0.83         | 0.65         |      |      |      |
| 5.5トン車<br>クラス     | アクトリガ最小              |               |                      | 1.38 (3.5m) |                     |             |      | —           | 0.80        | 0.60        | 0.50         | 0.38         | 0.33         | 0.25         |      |      |      |
|                   | リヤアクトリガ無し<br>(標準仕様)  |               |                      | アクトリガ最大     | 2.03                |             |      |             | 2.03 (3.7m) | 1.20        | 0.90         | 0.70         | 0.55         | 0.48         | 0.35 |      |      |
| リヤアクトリガ付          | アクトリガ最小              |               |                      | 0.75        |                     |             |      | 0.75 (3.7m) | 0.45        | 0.33        | 0.25         | 0.18         | 0.15         | 0.13         |      |      |      |
|                   | アクトリガ最大              |               |                      | 2.03        |                     |             |      | 2.03 (4.3m) | 1.53        | 1.13        | 0.88         | 0.70         | 0.60         | 0.45         |      |      |      |
| リヤアクトリガ付          | アクトリガ最小              |               |                      | 0.75        |                     |             |      | 0.75 (4.3m) | 0.55        | 0.40        | 0.30         | 0.25         | 0.20         | 0.15         |      |      |      |






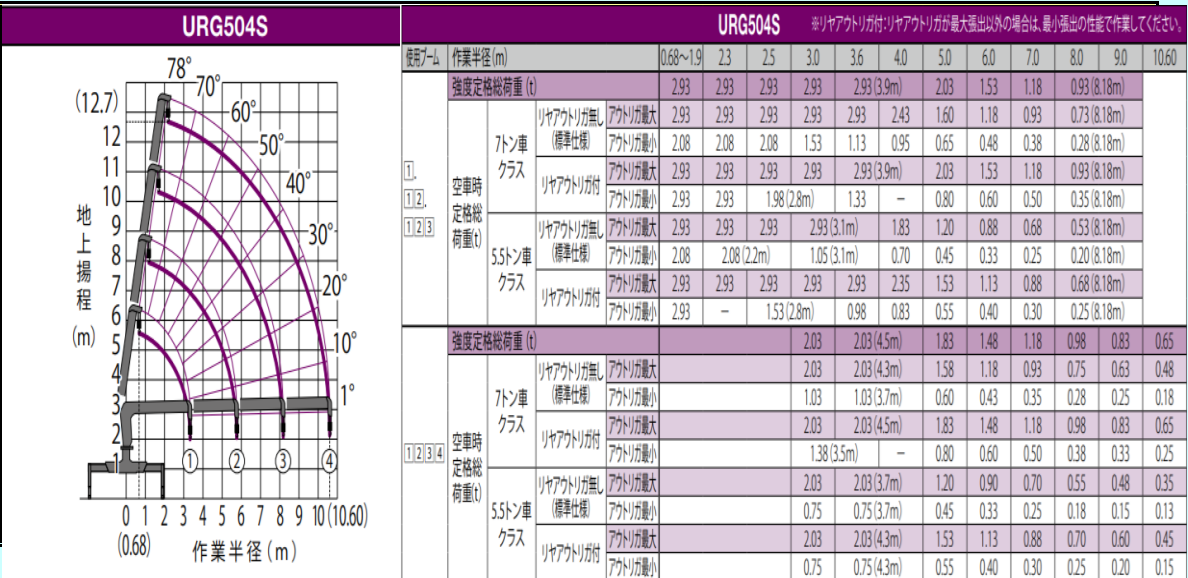
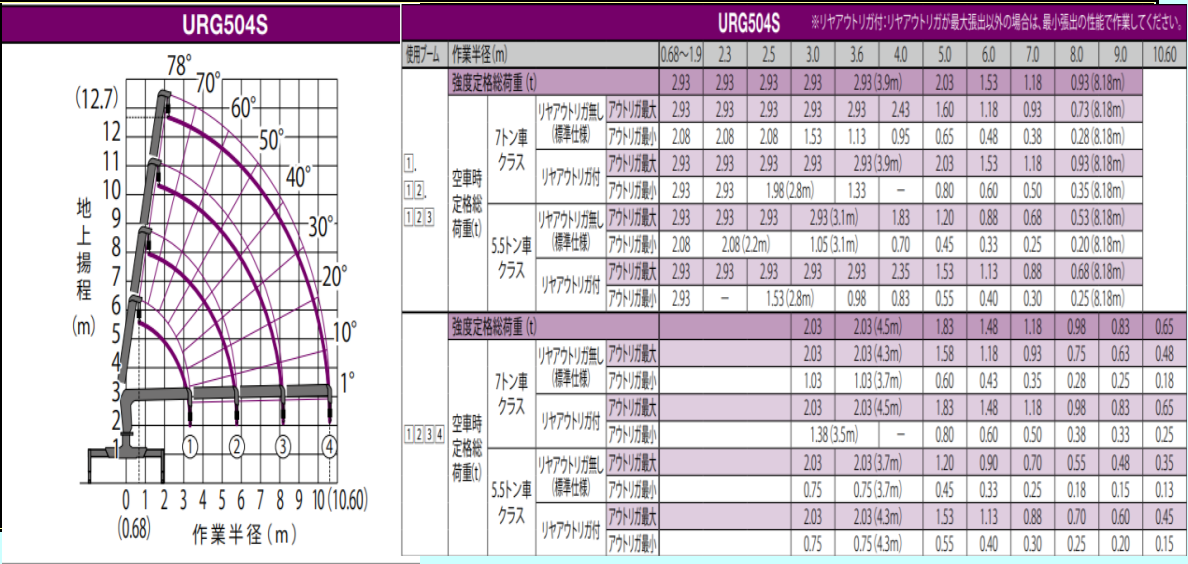
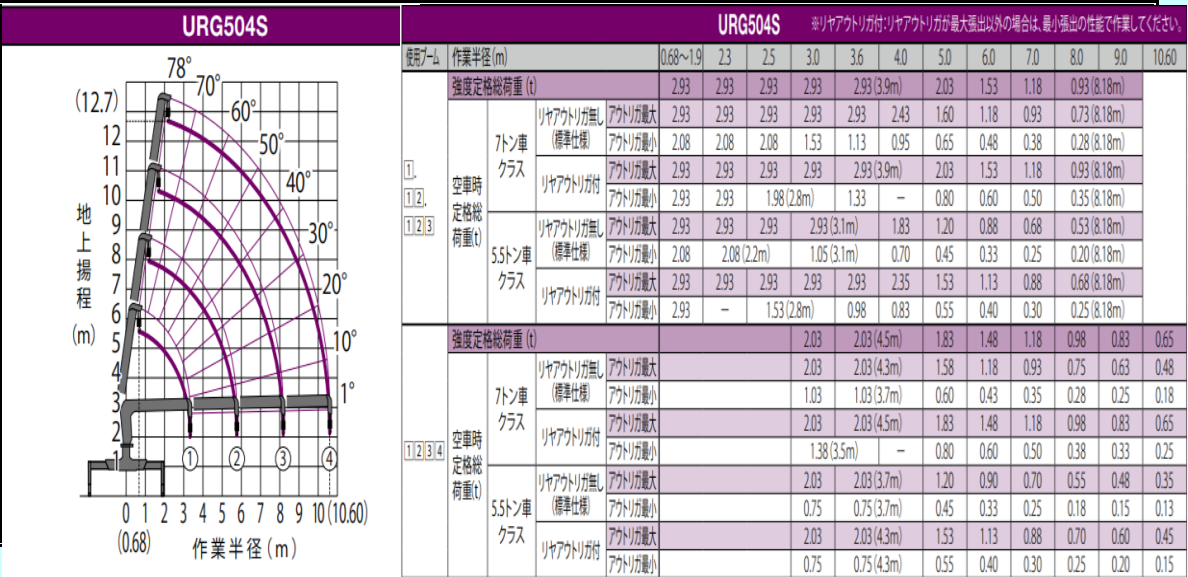


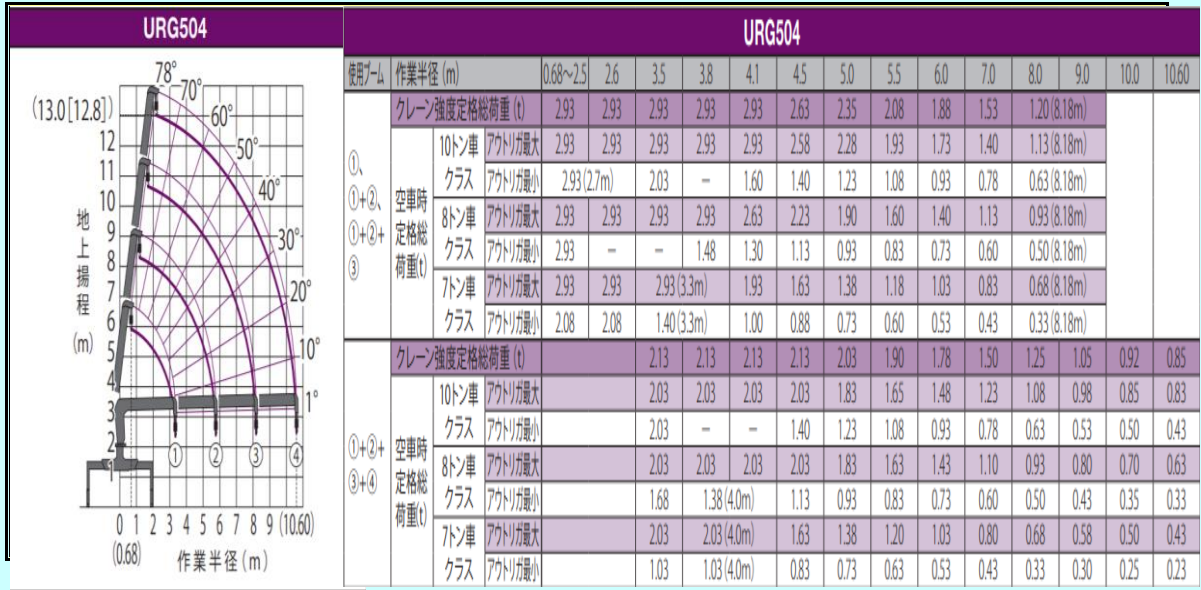
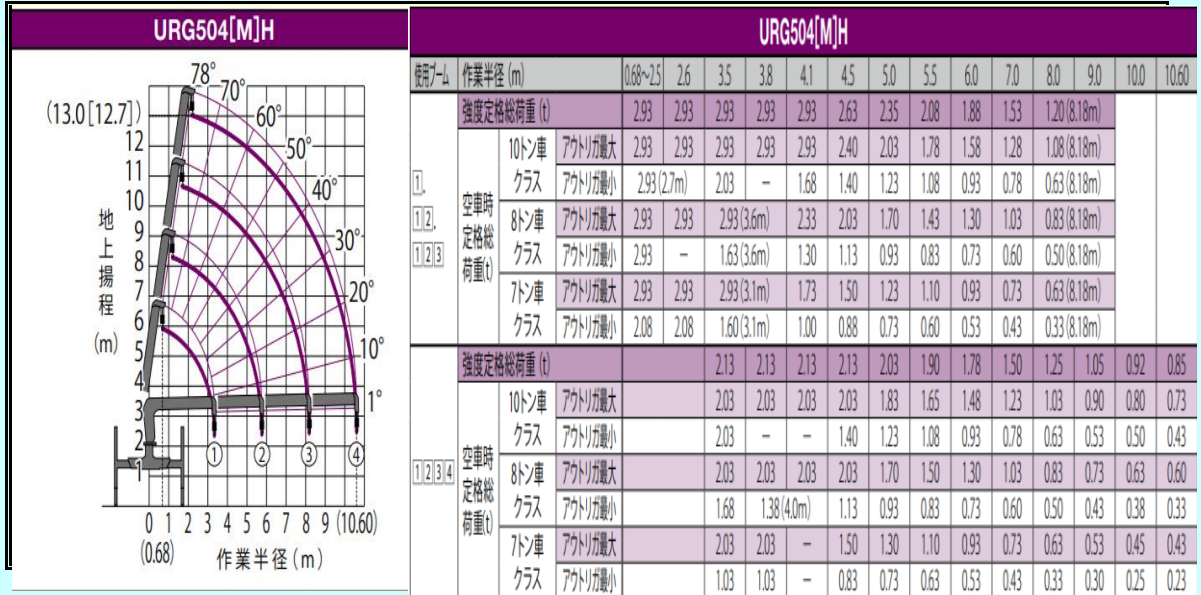
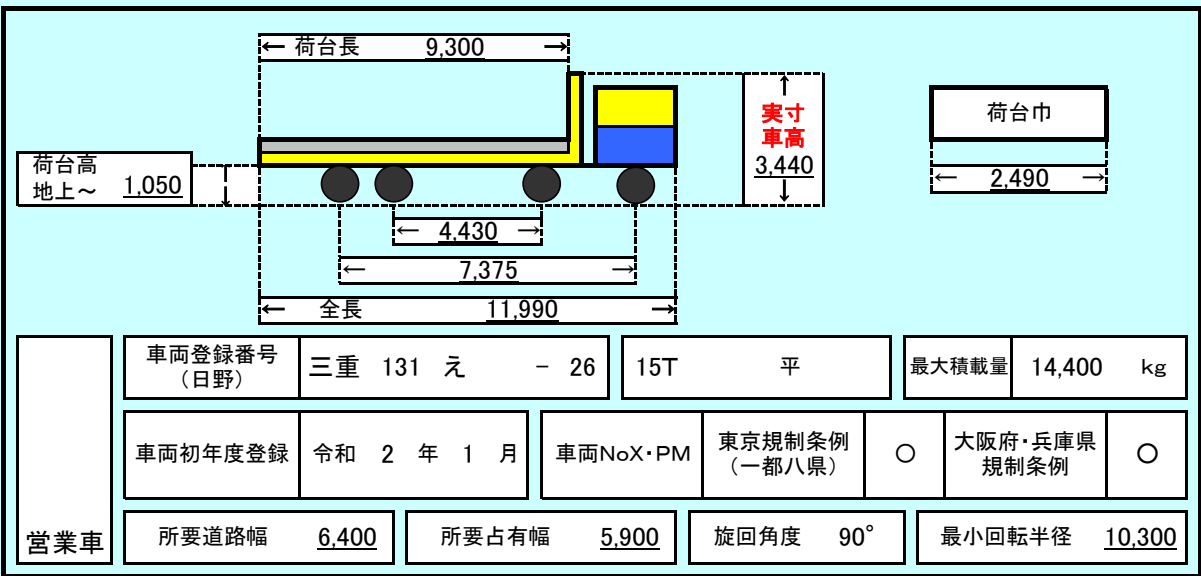
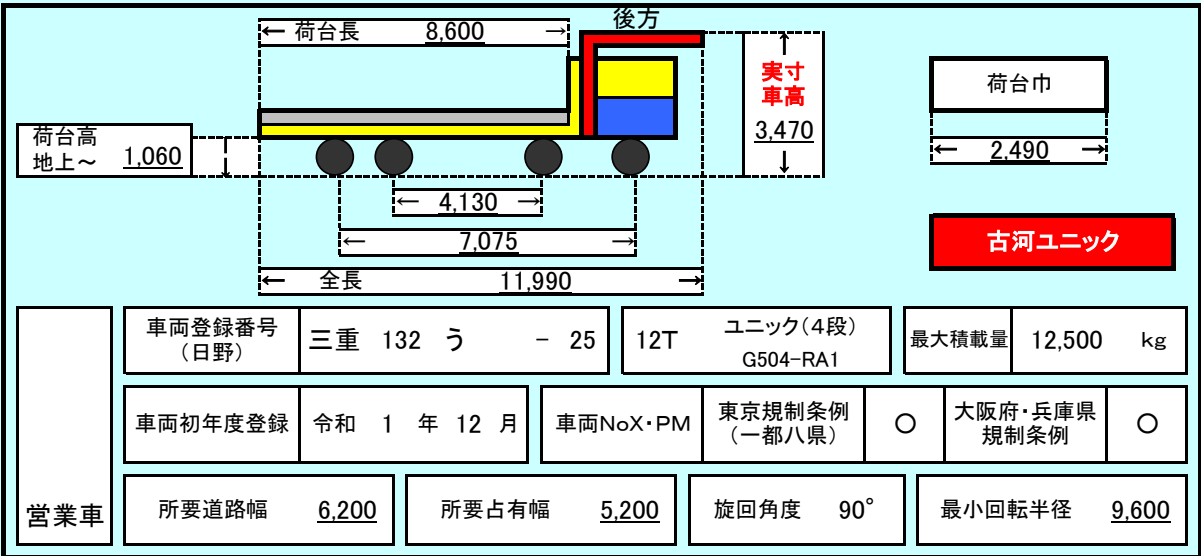
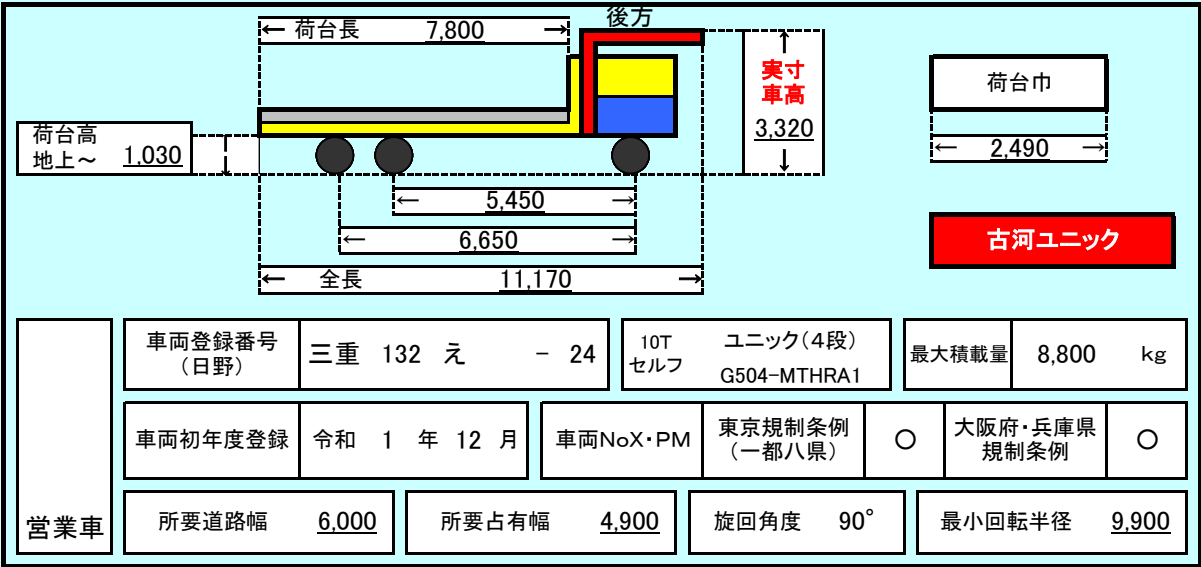




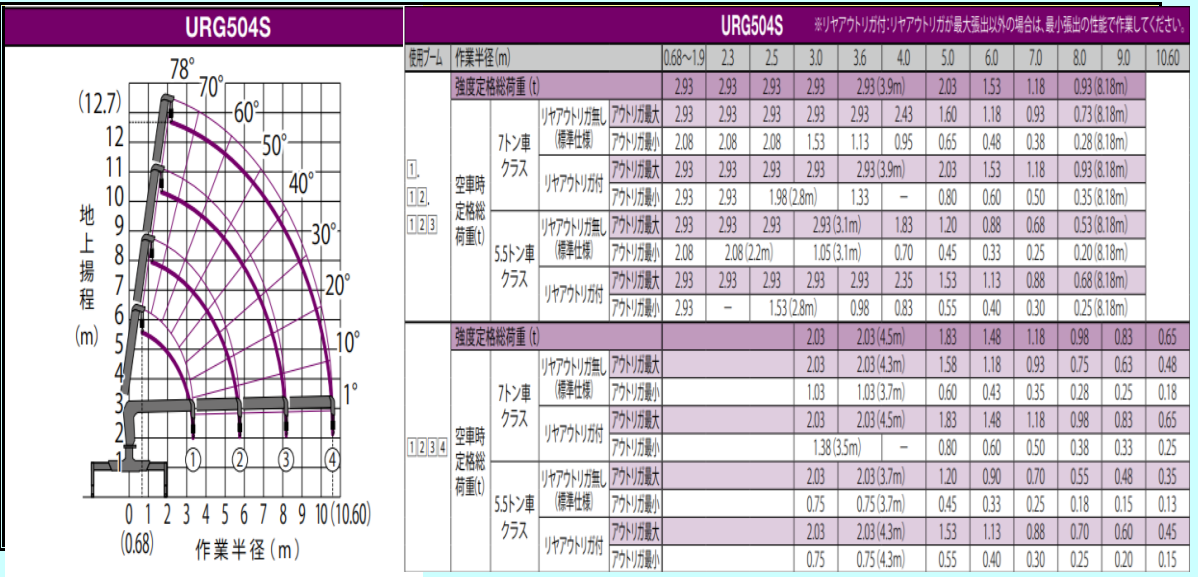
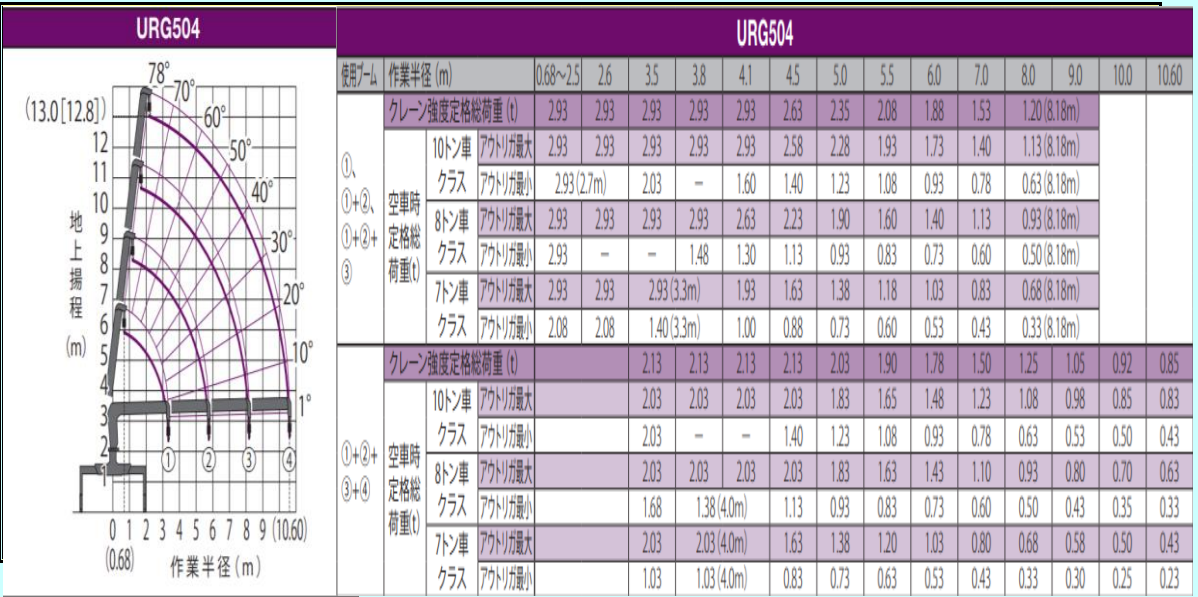
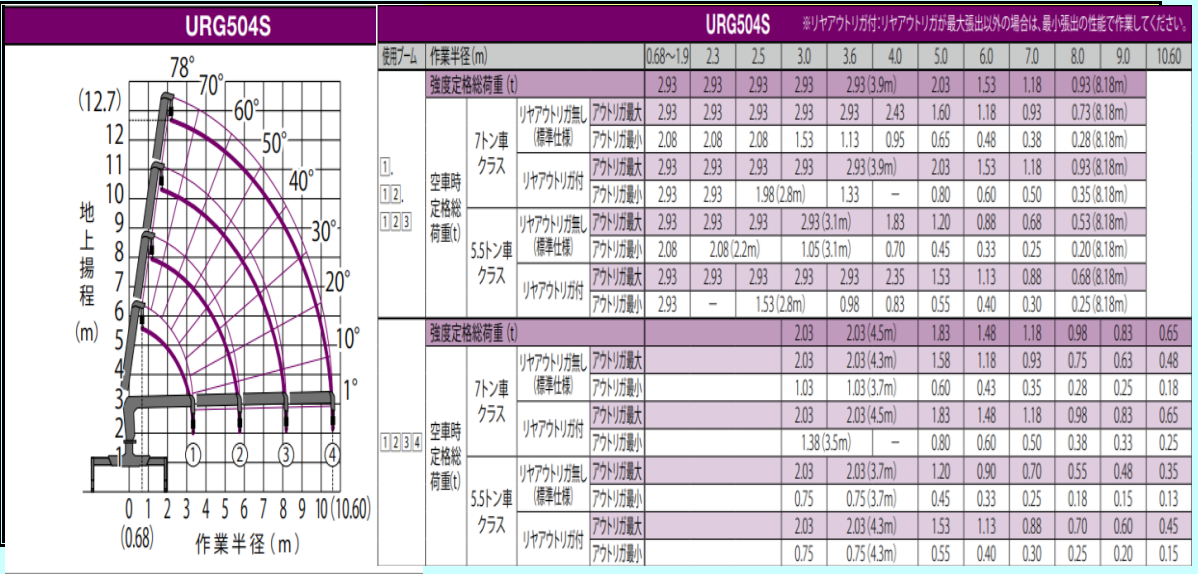
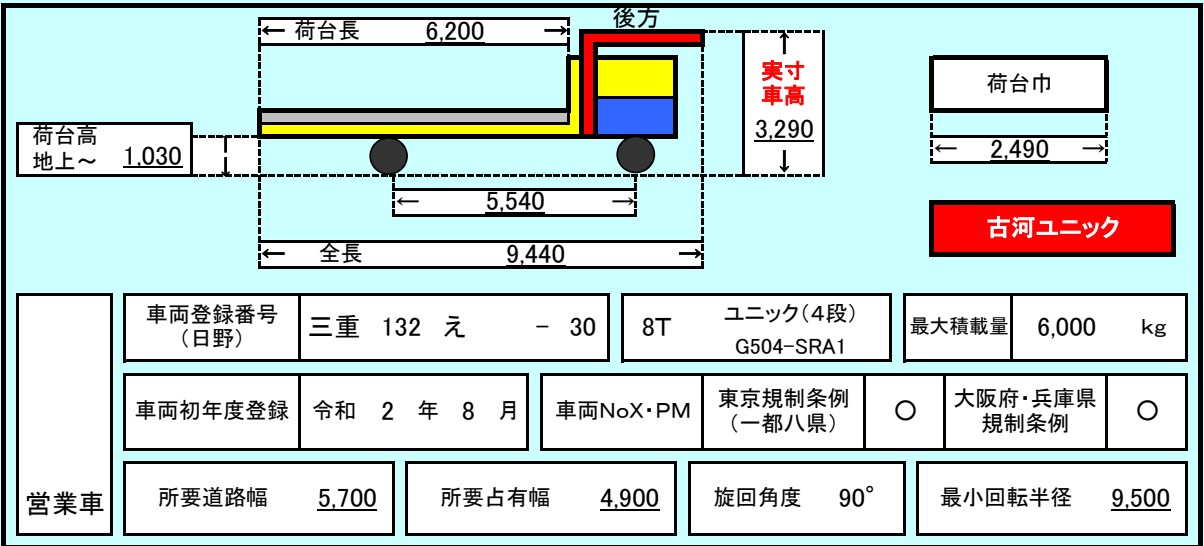
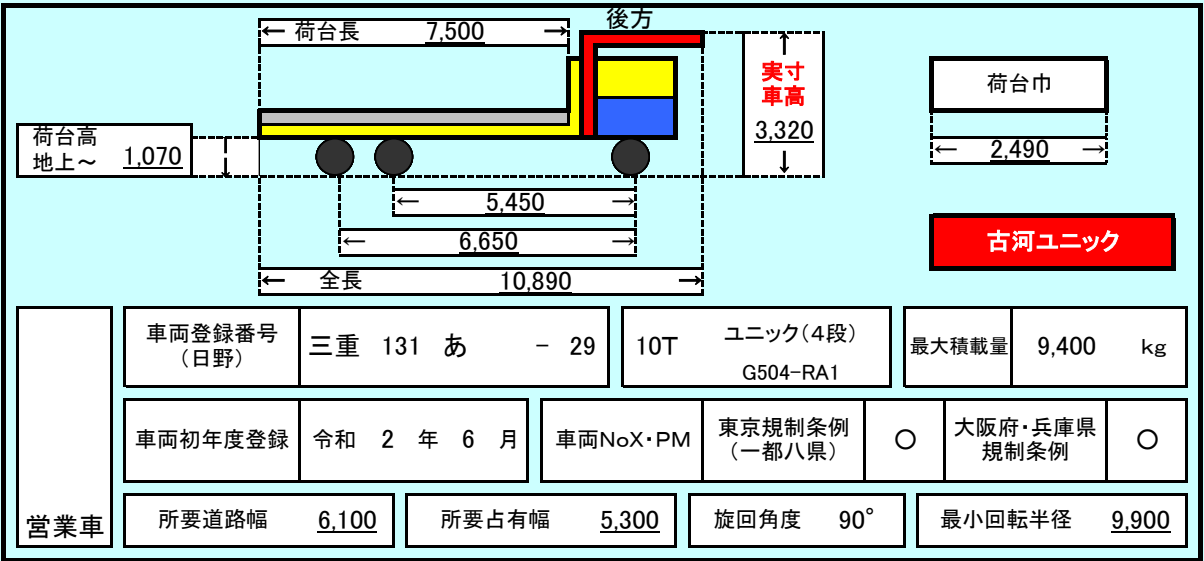
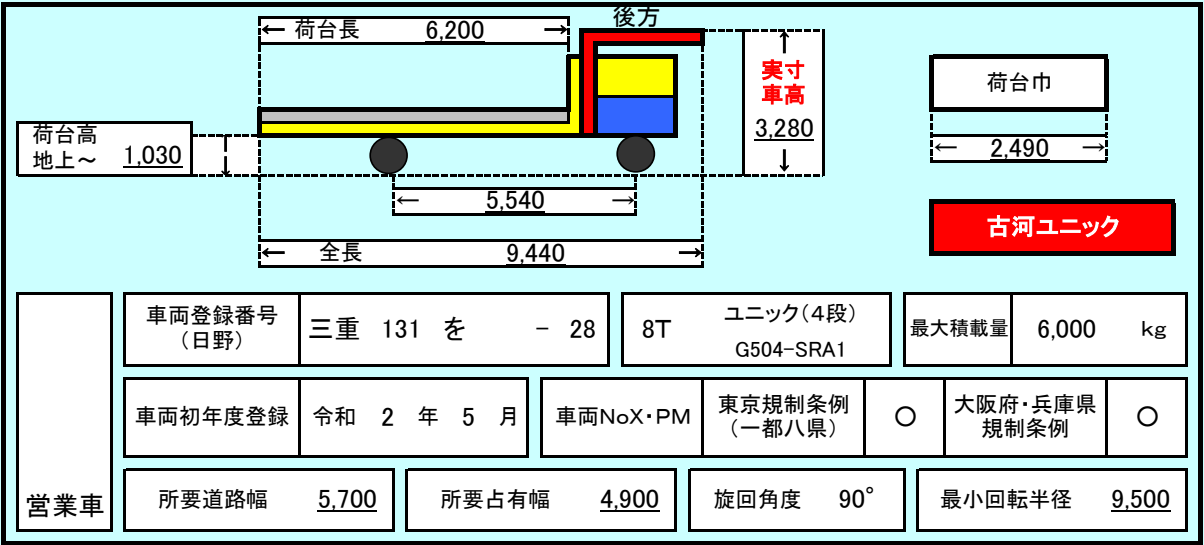










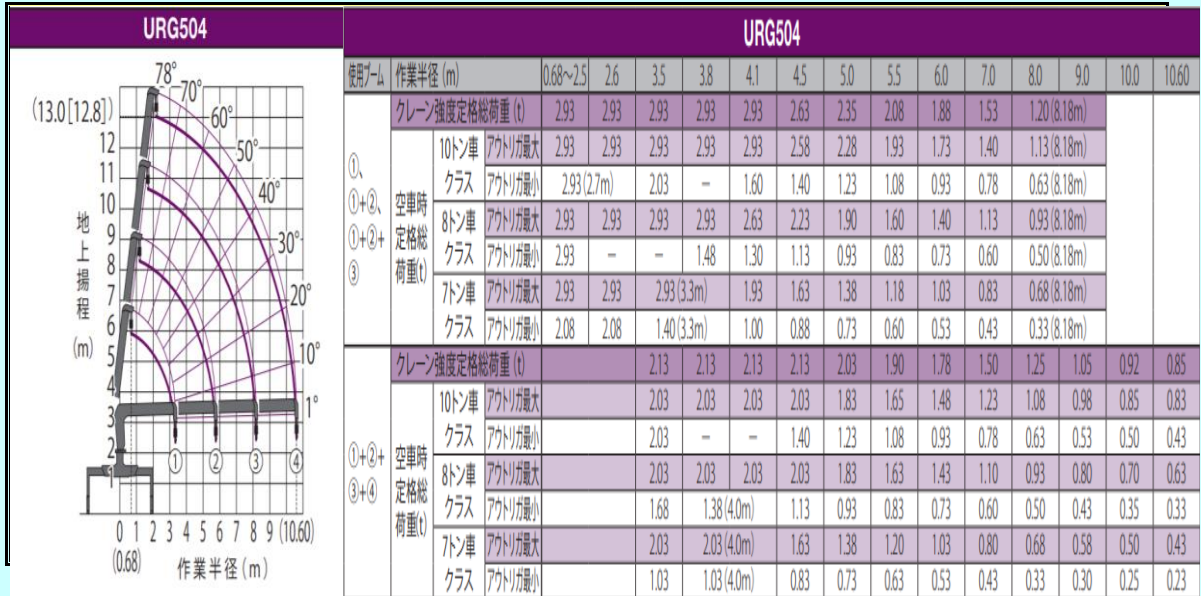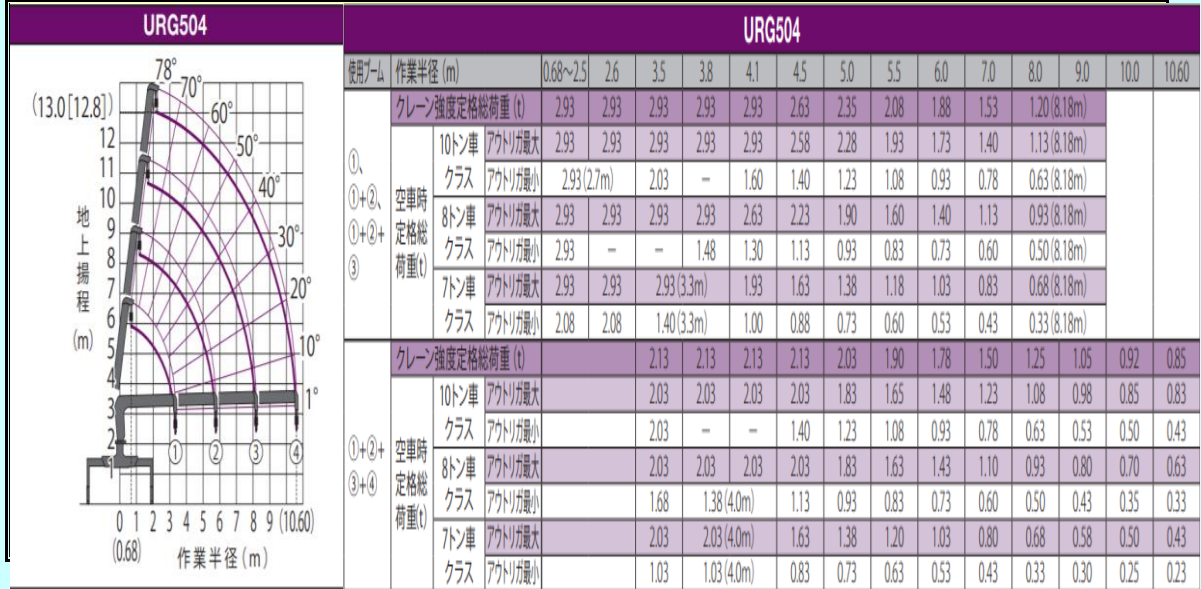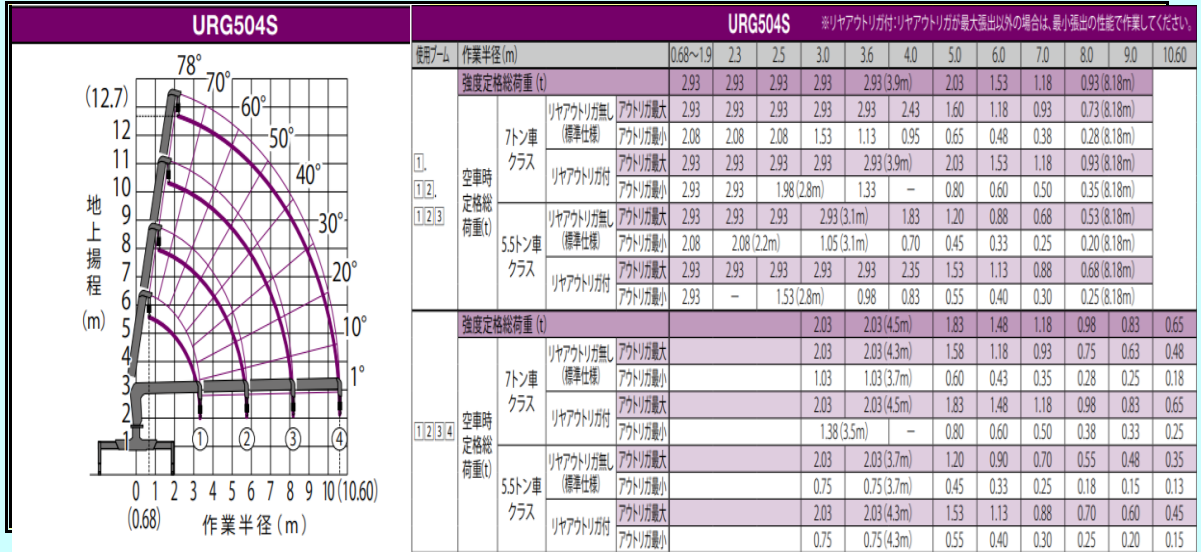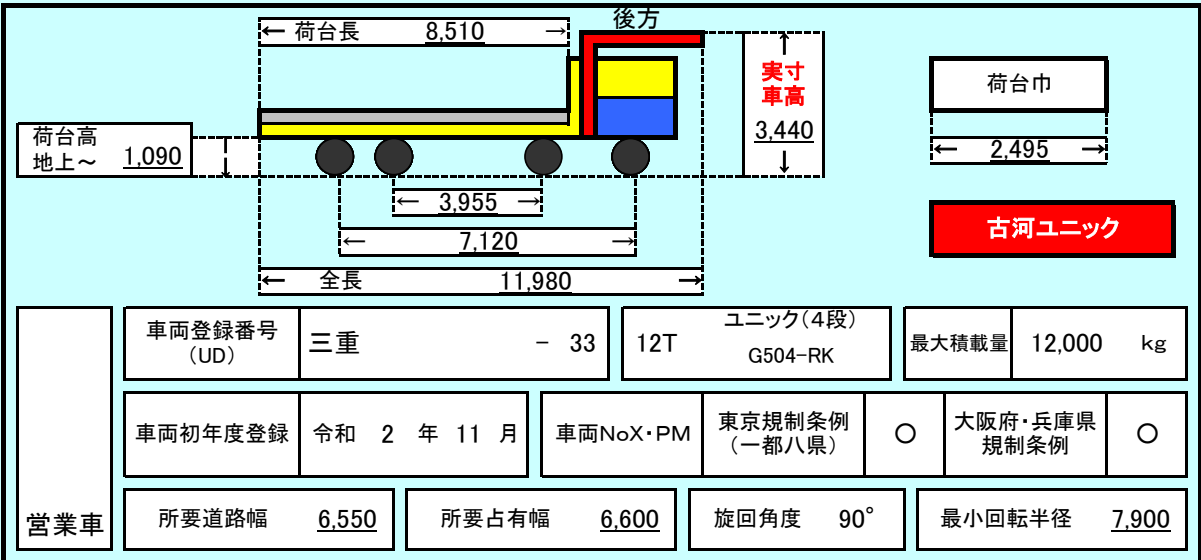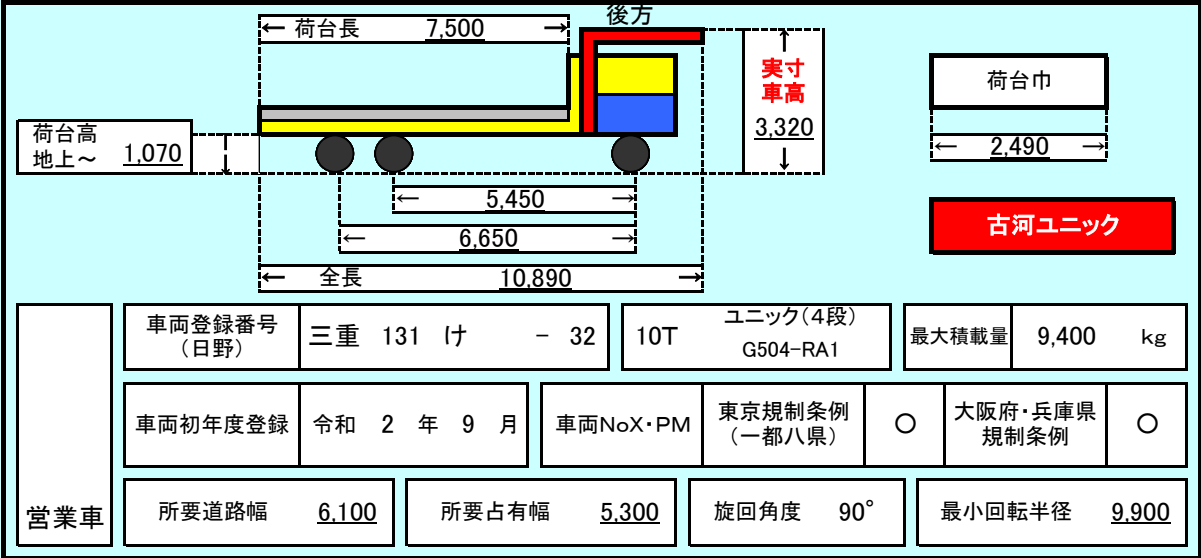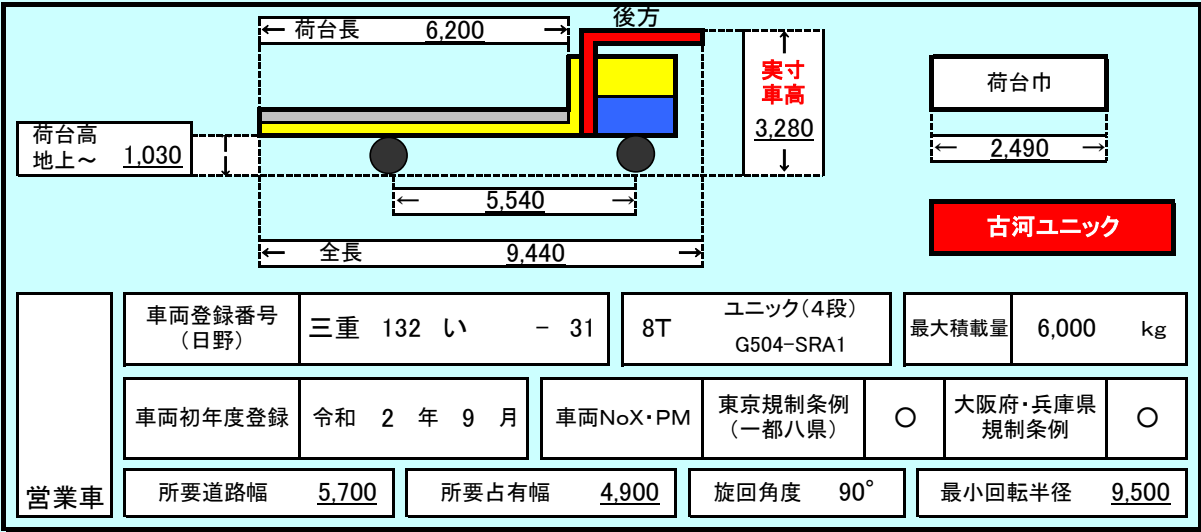


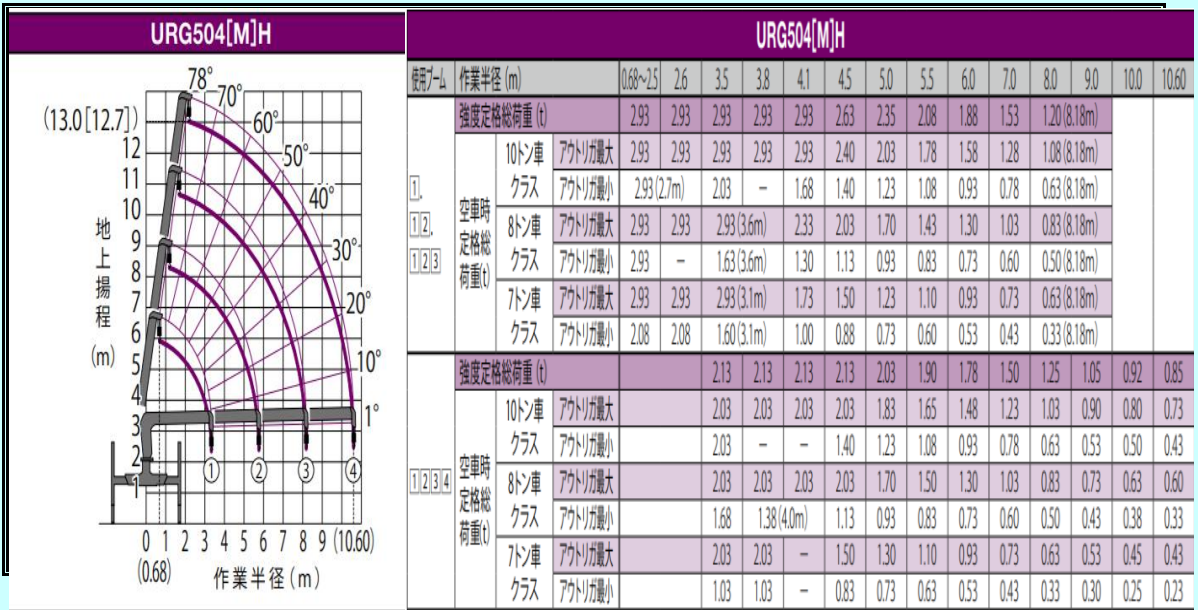
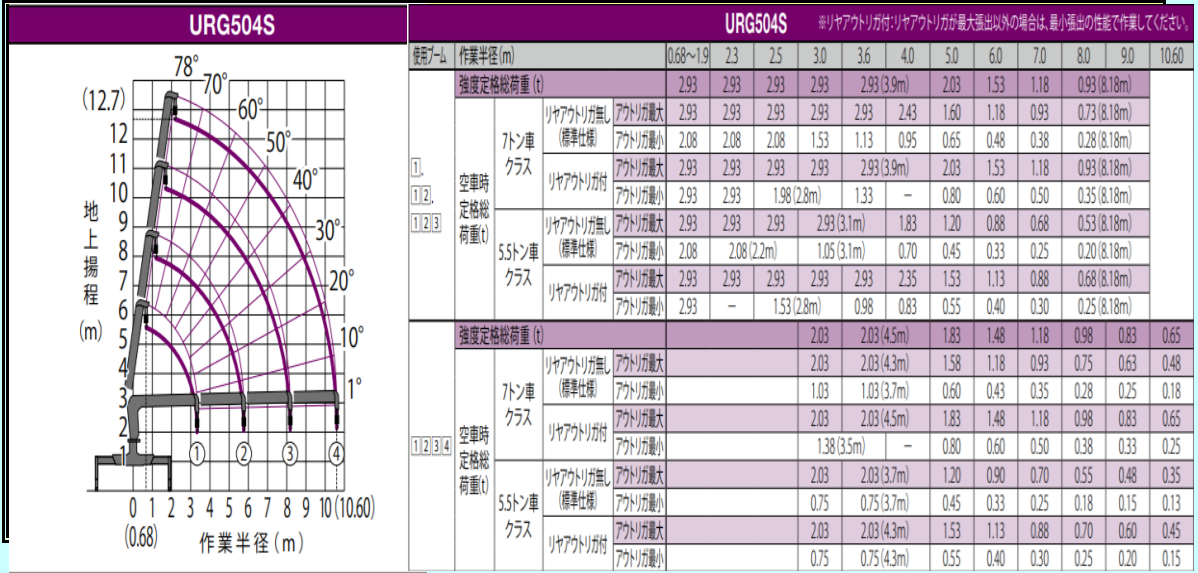
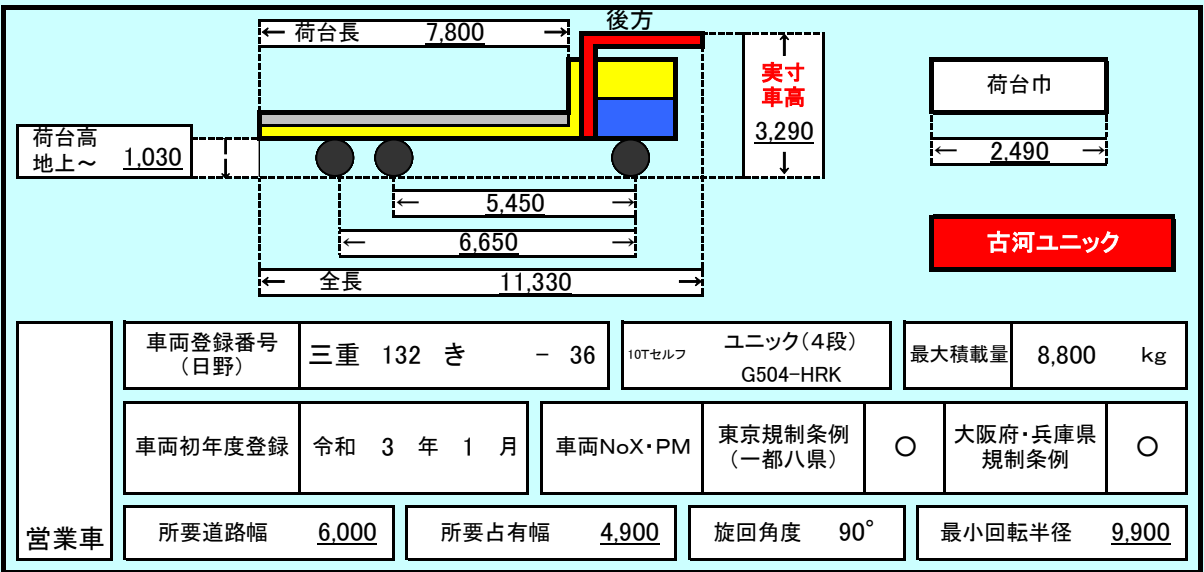
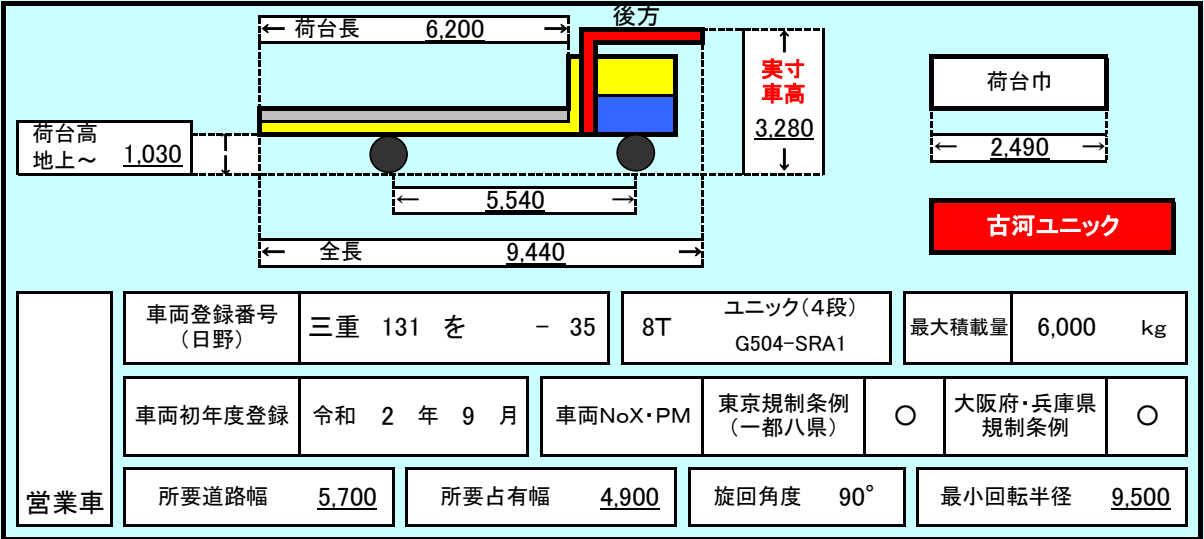
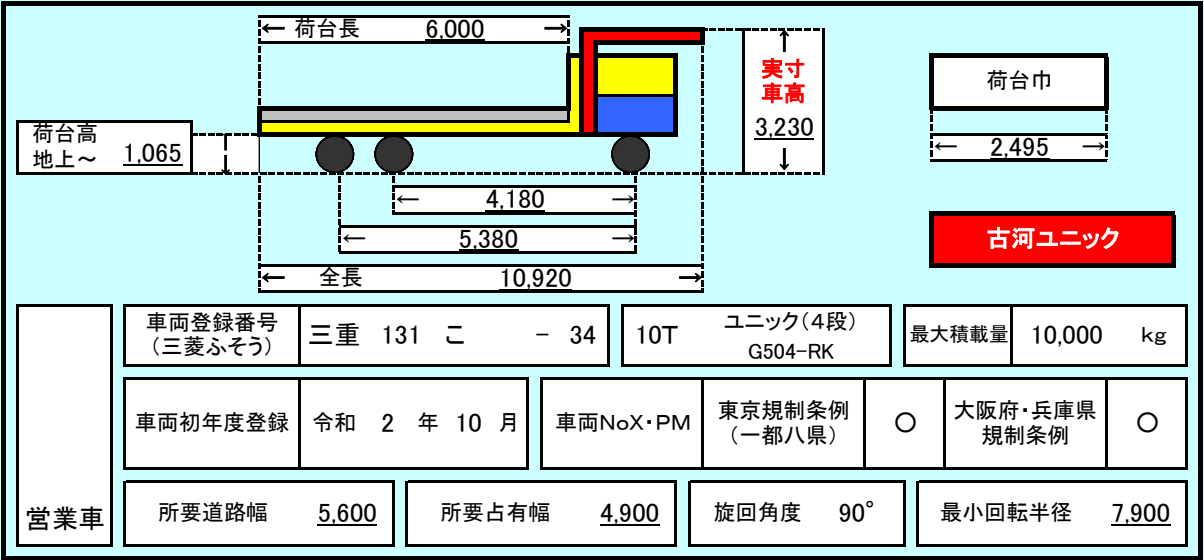










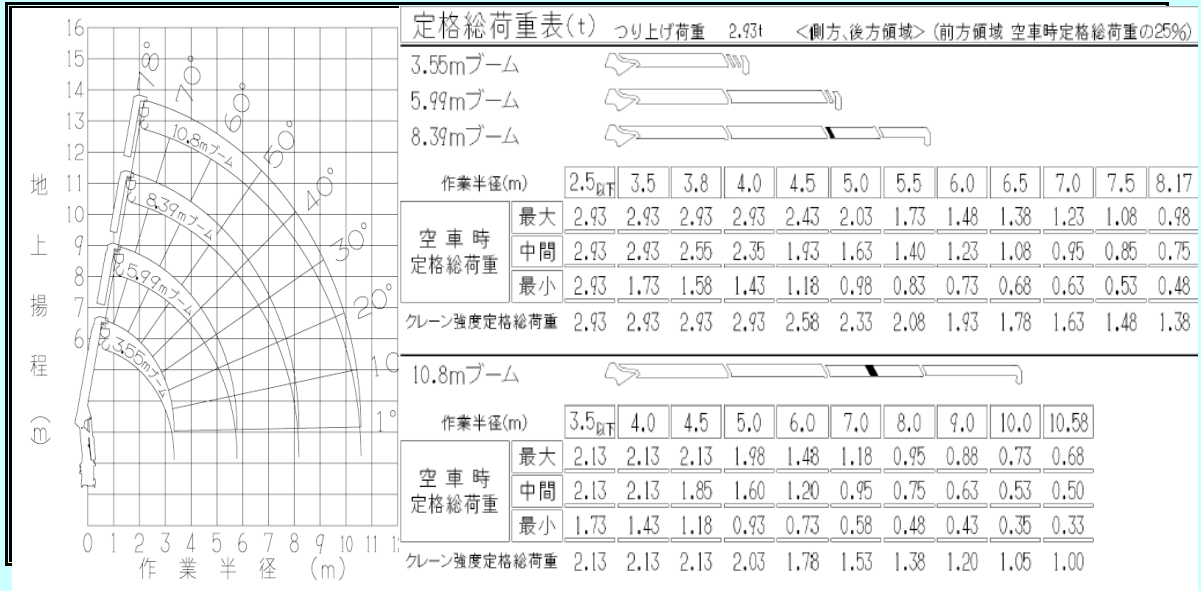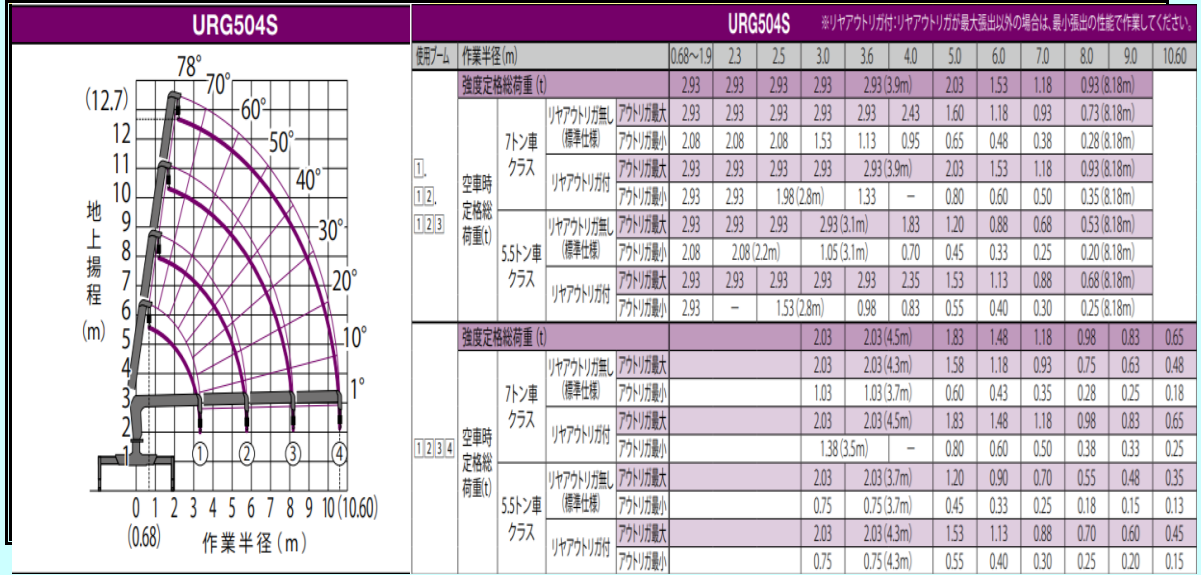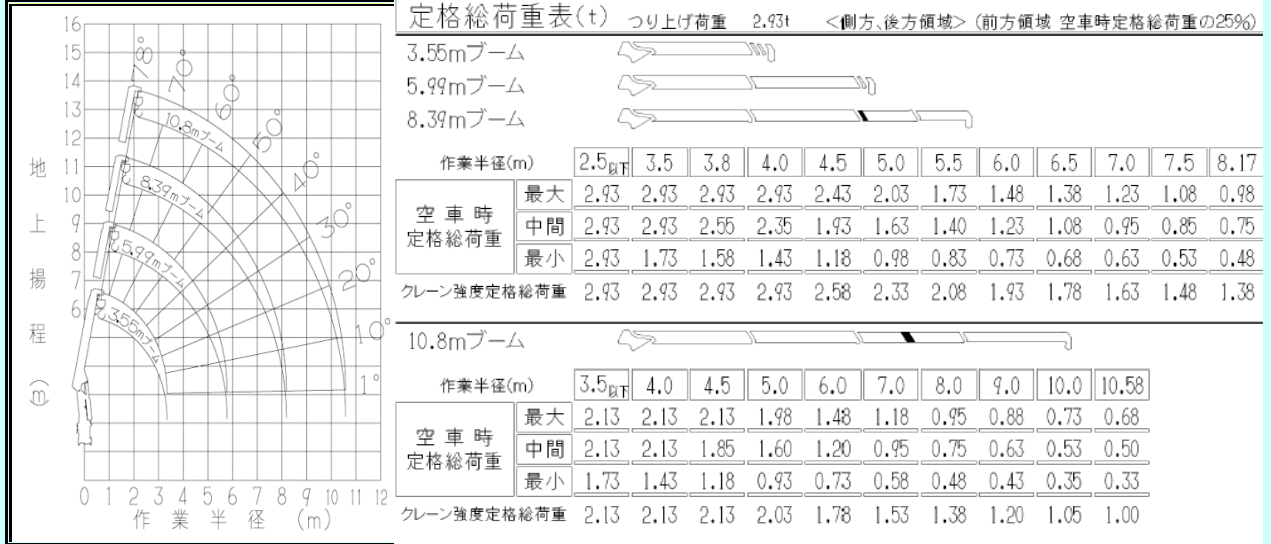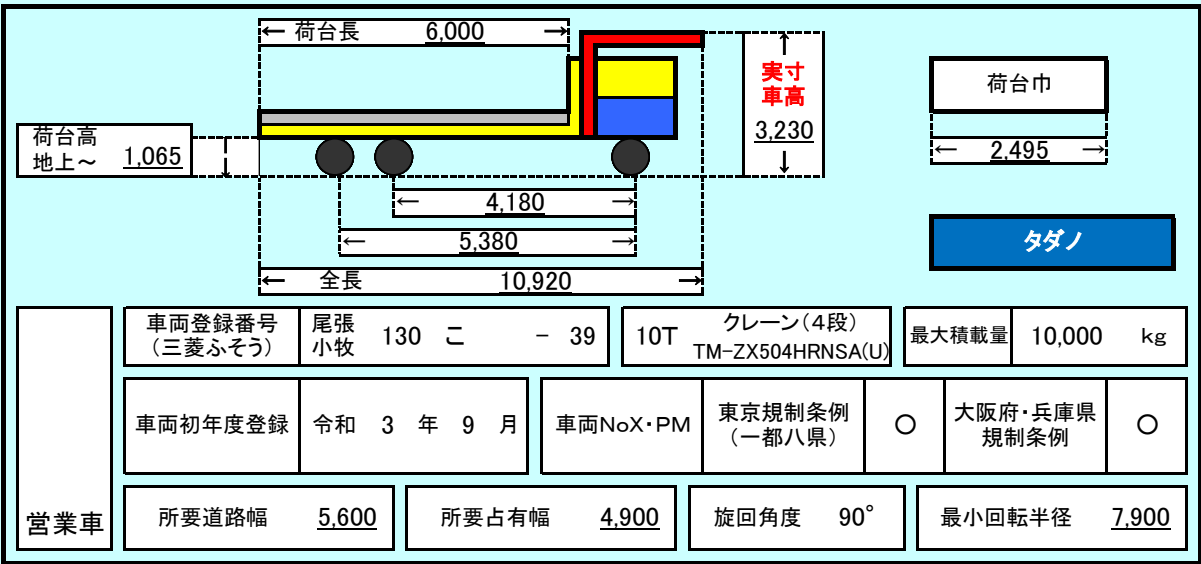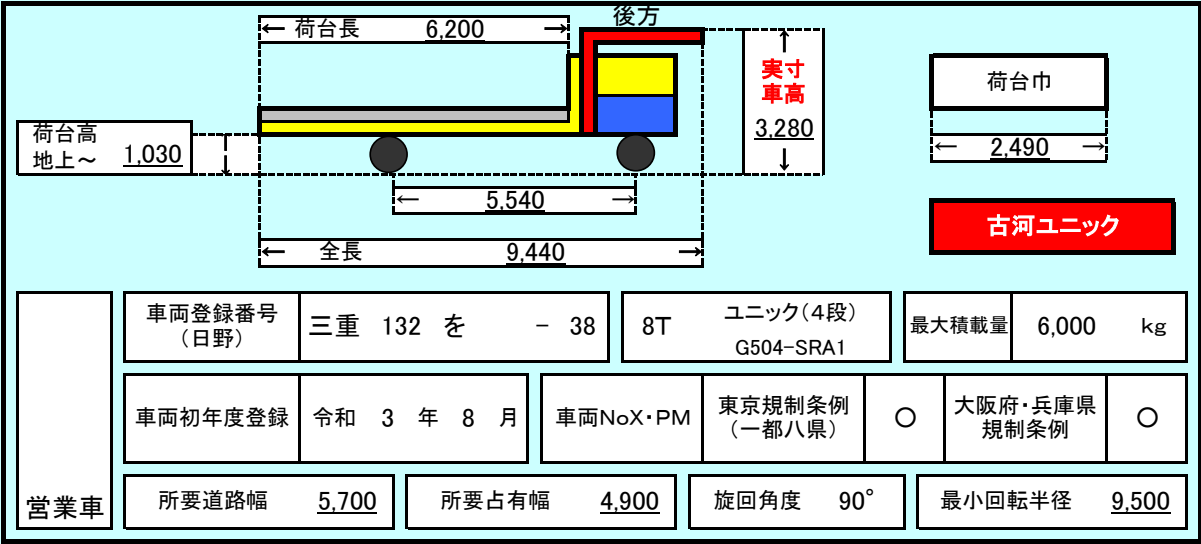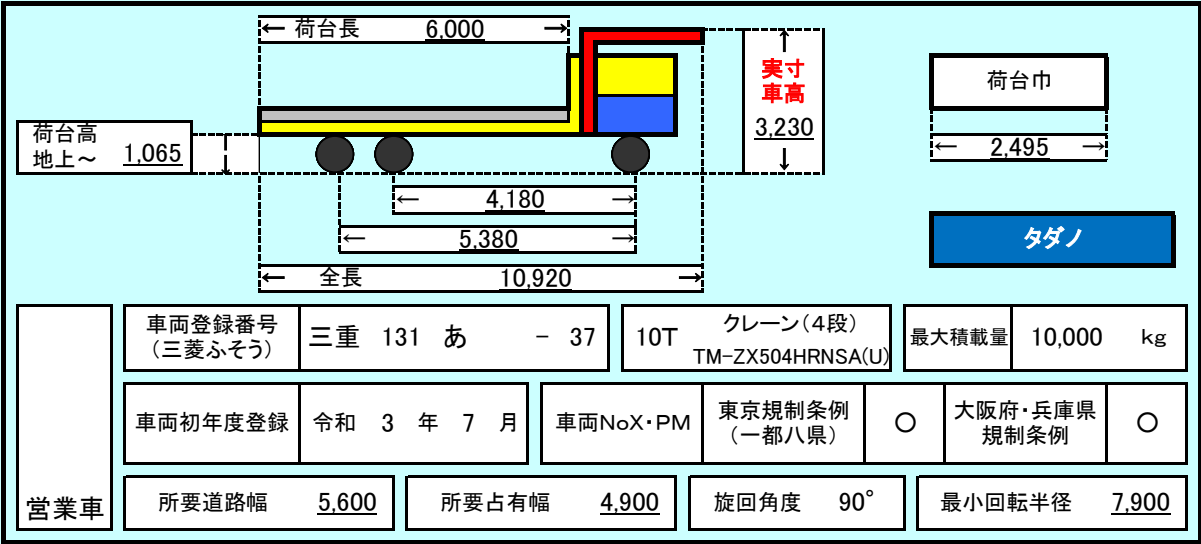

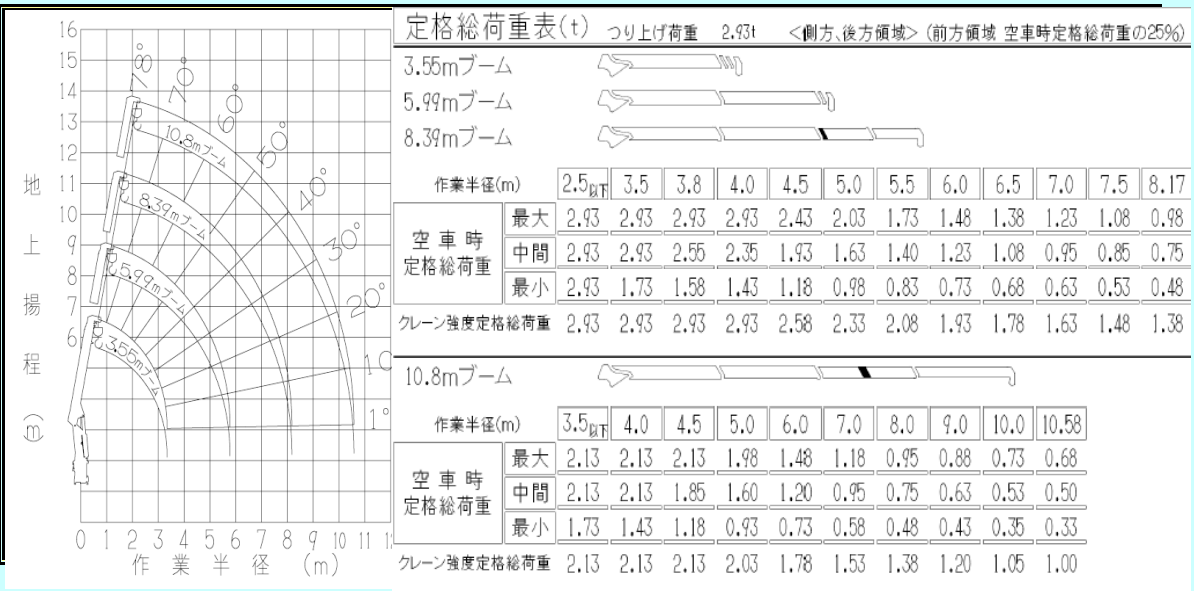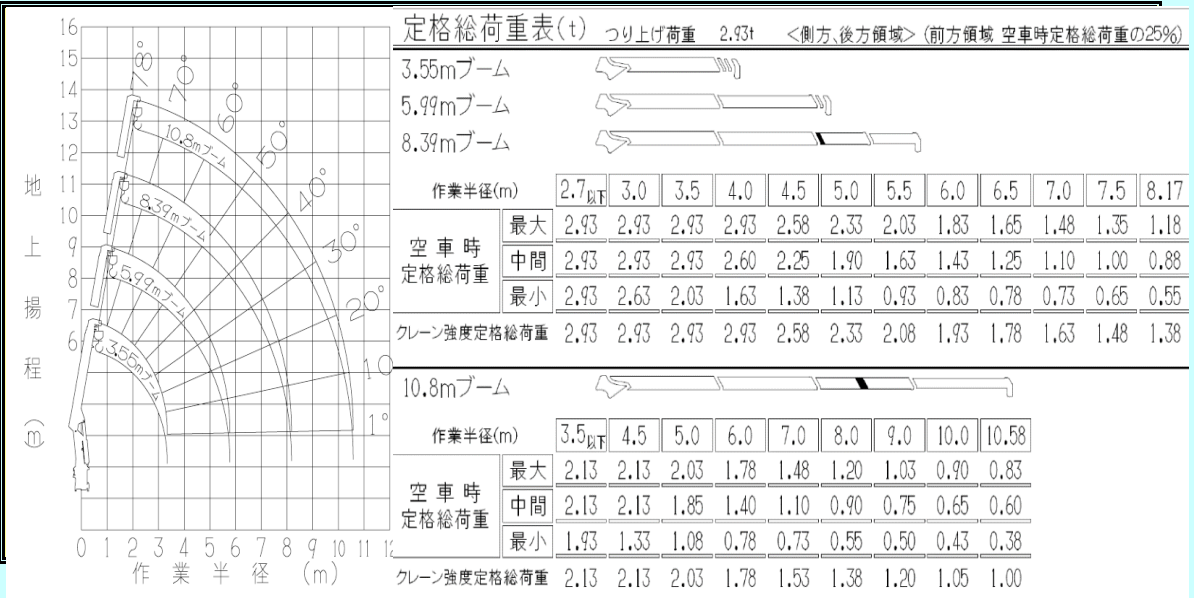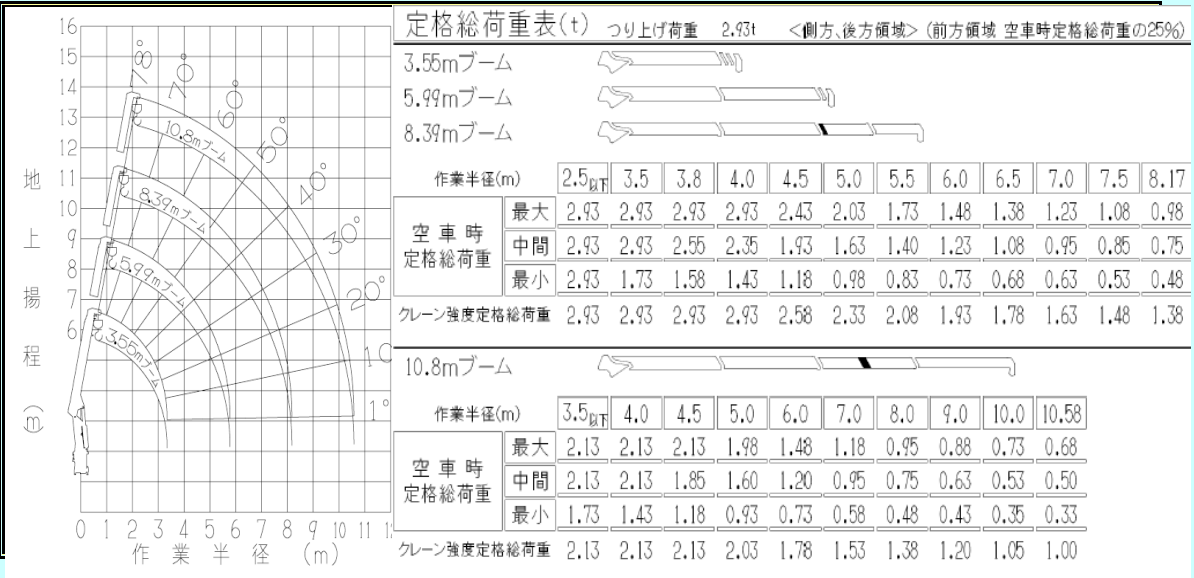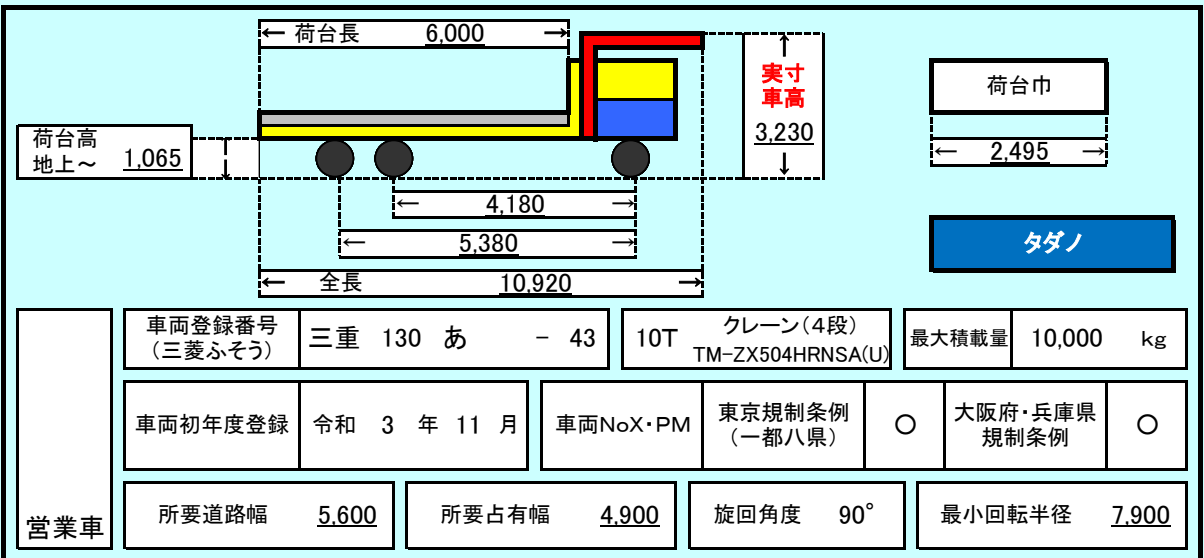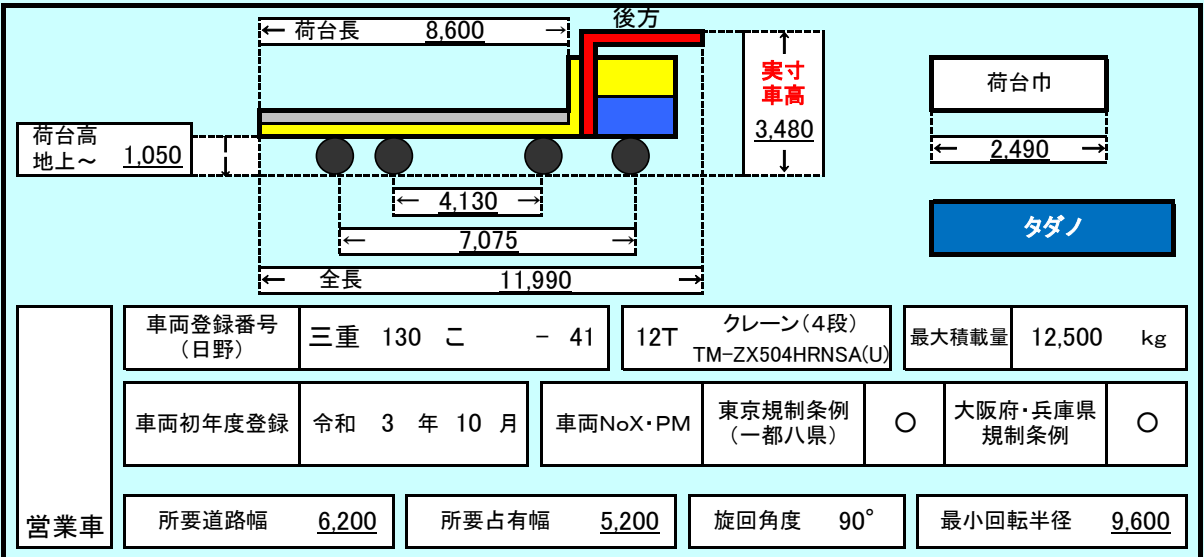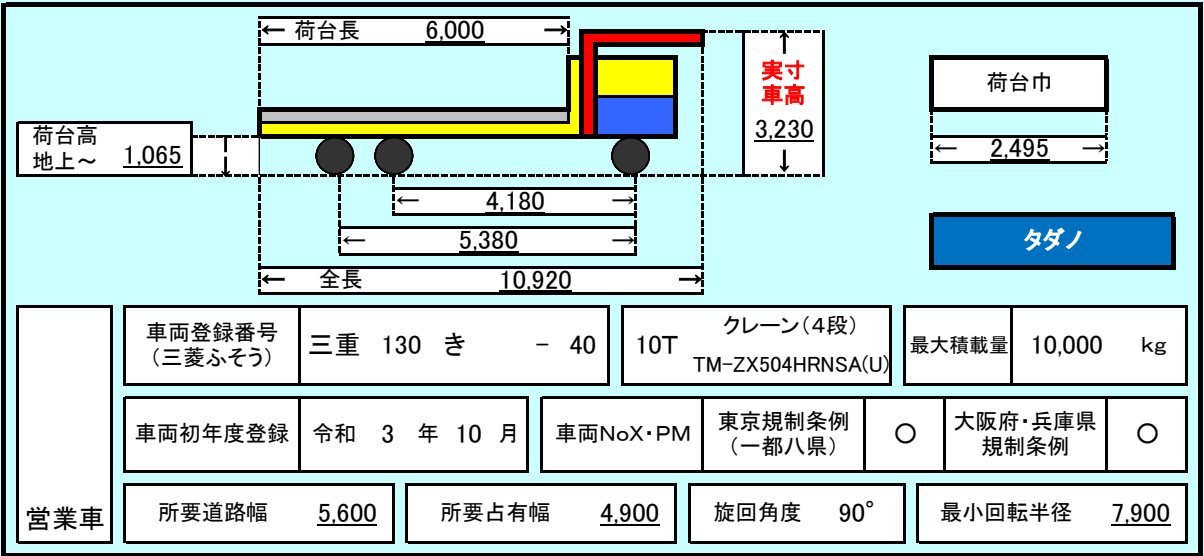



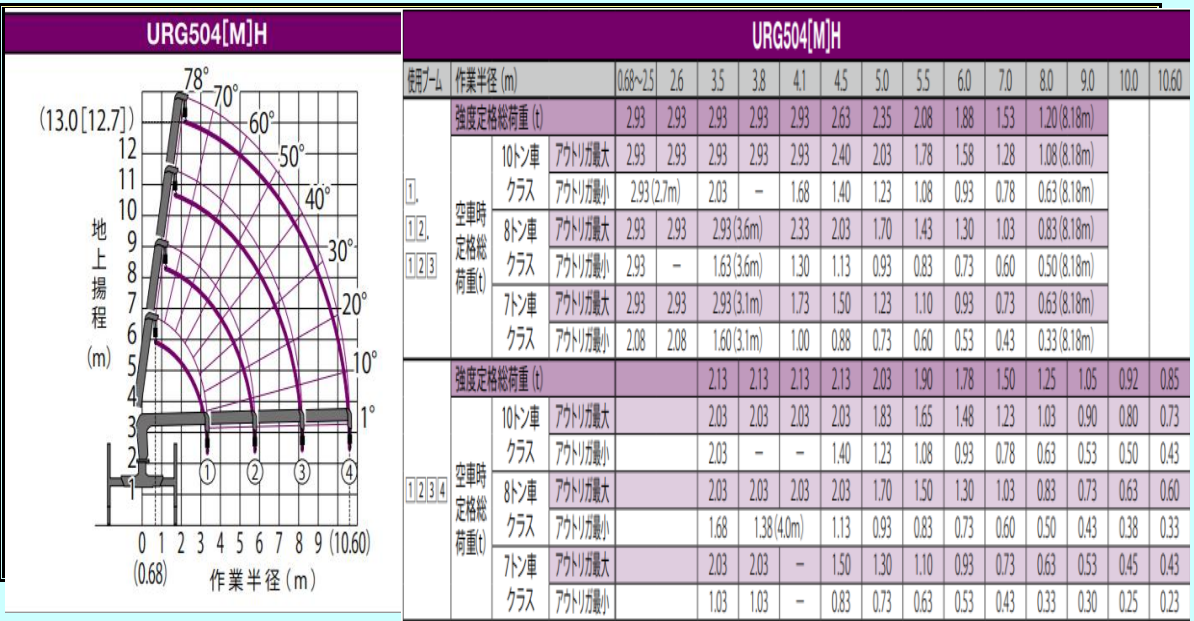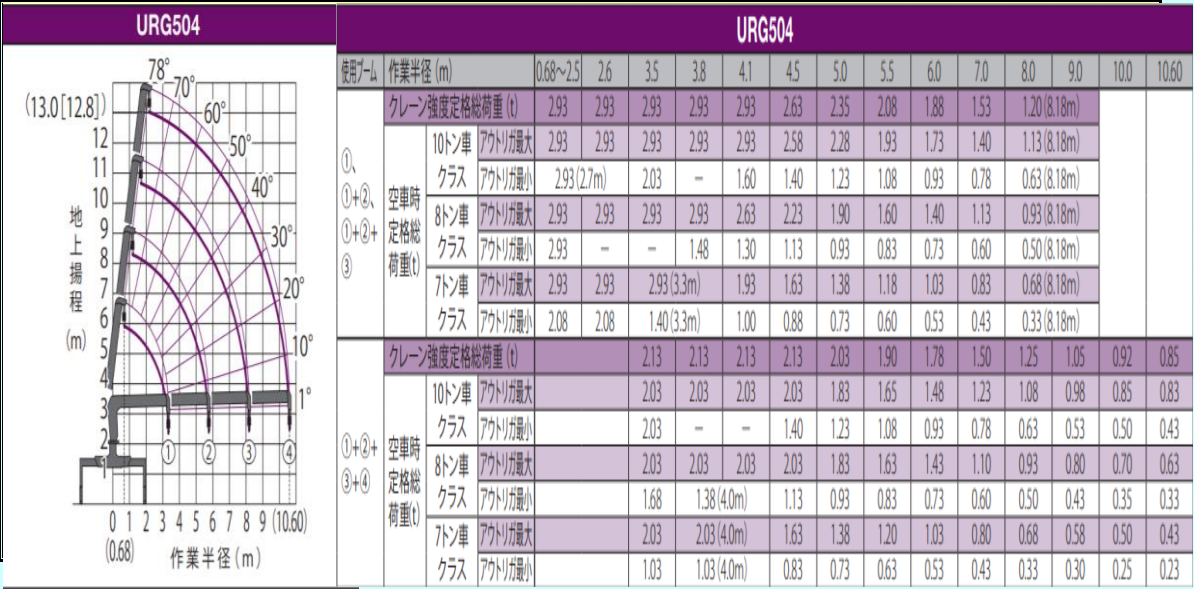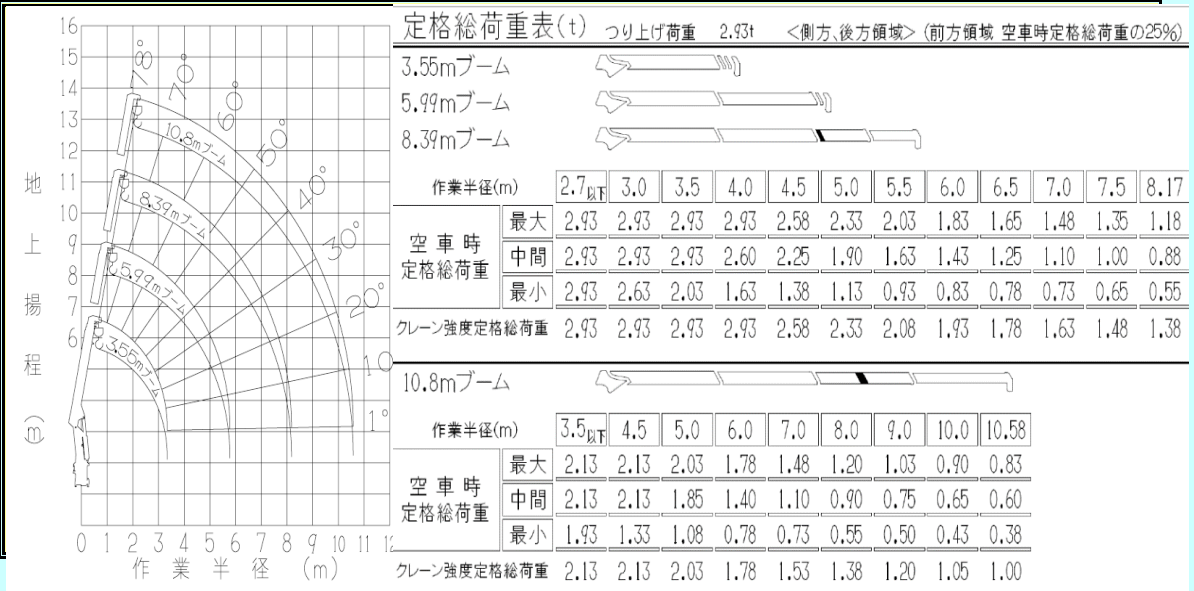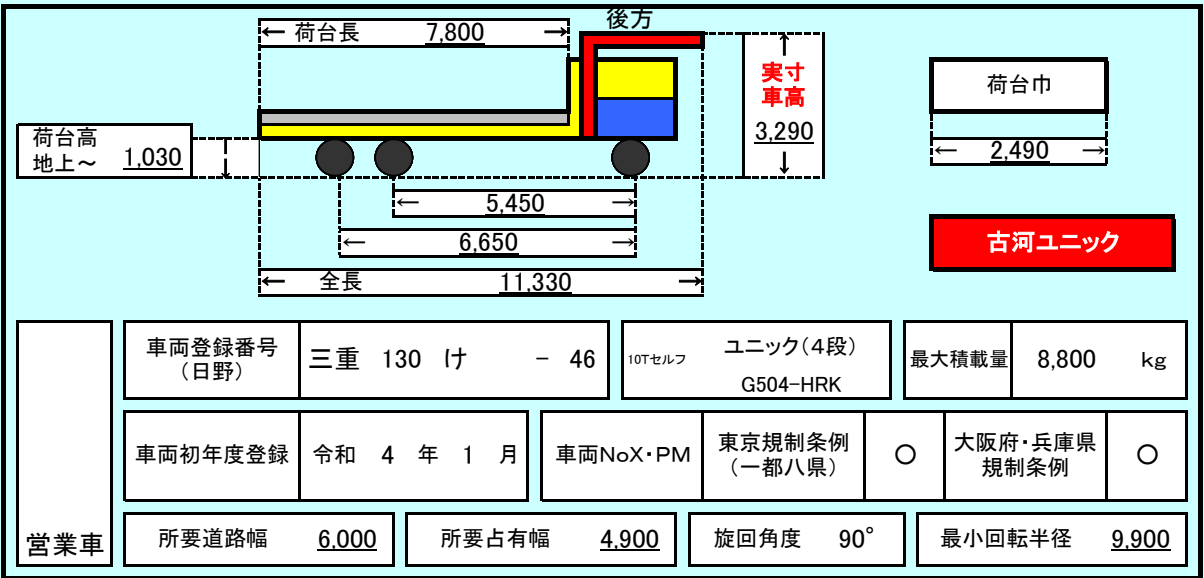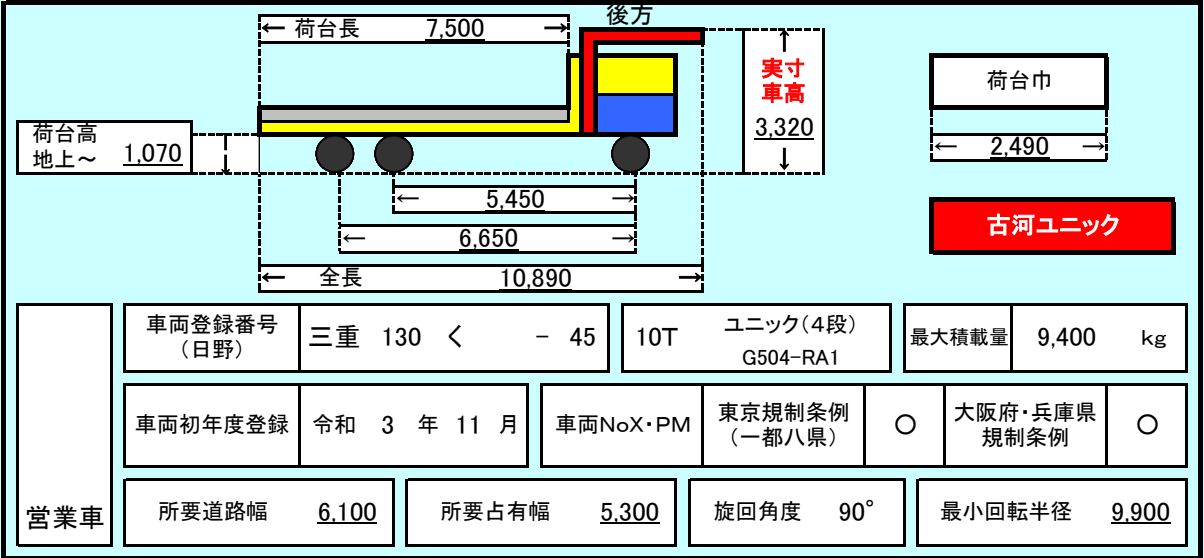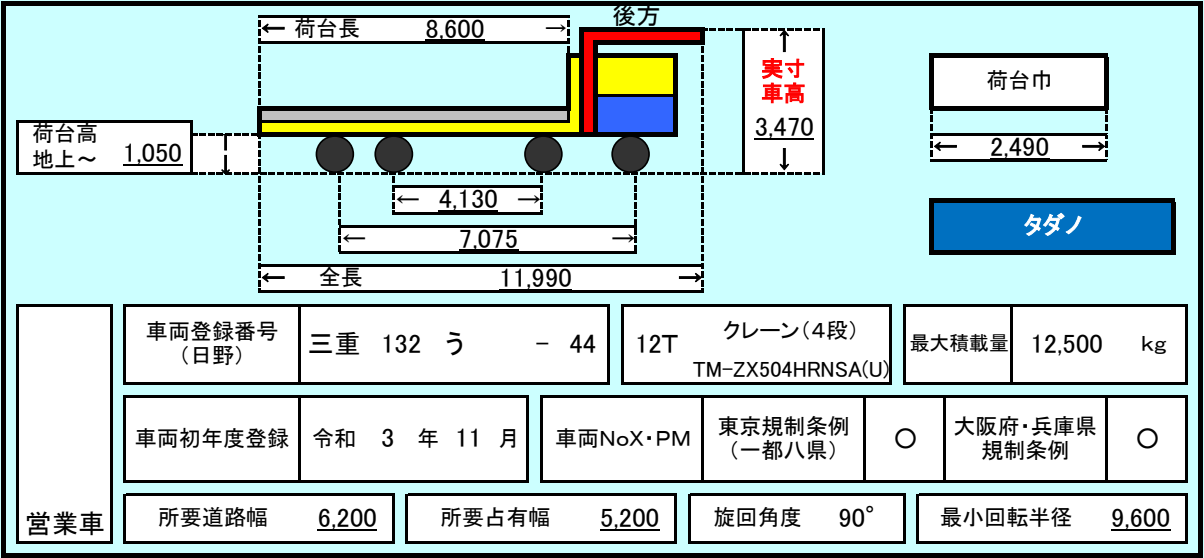

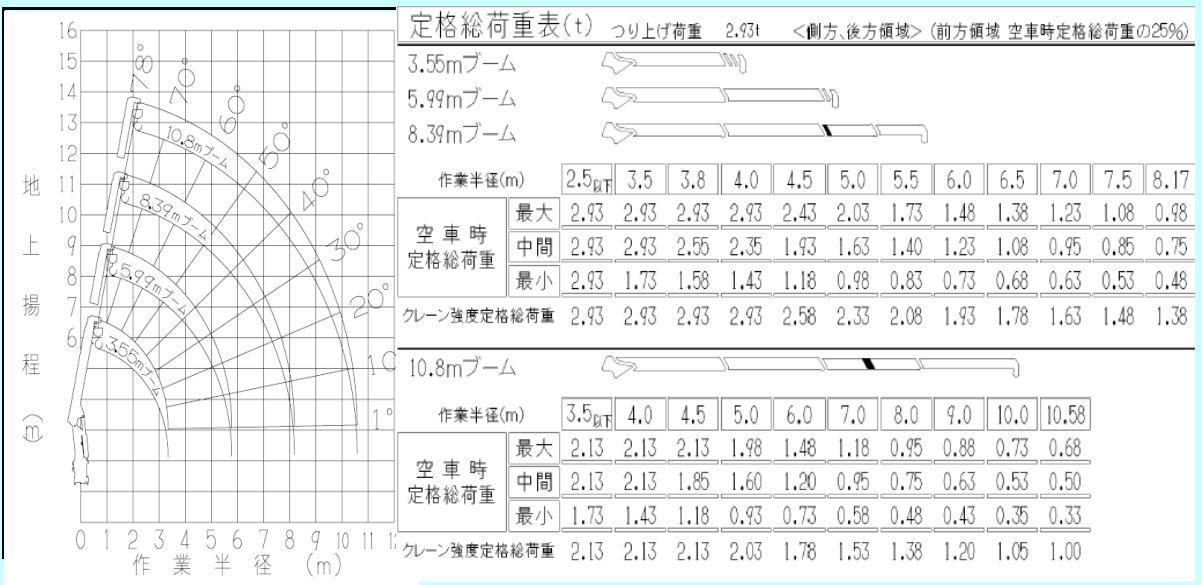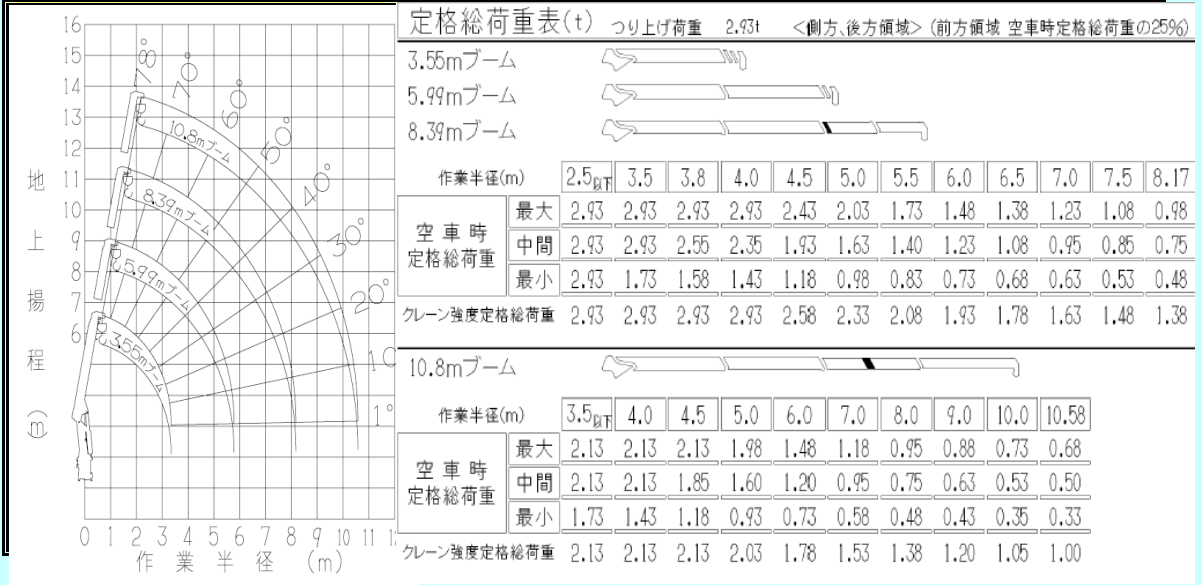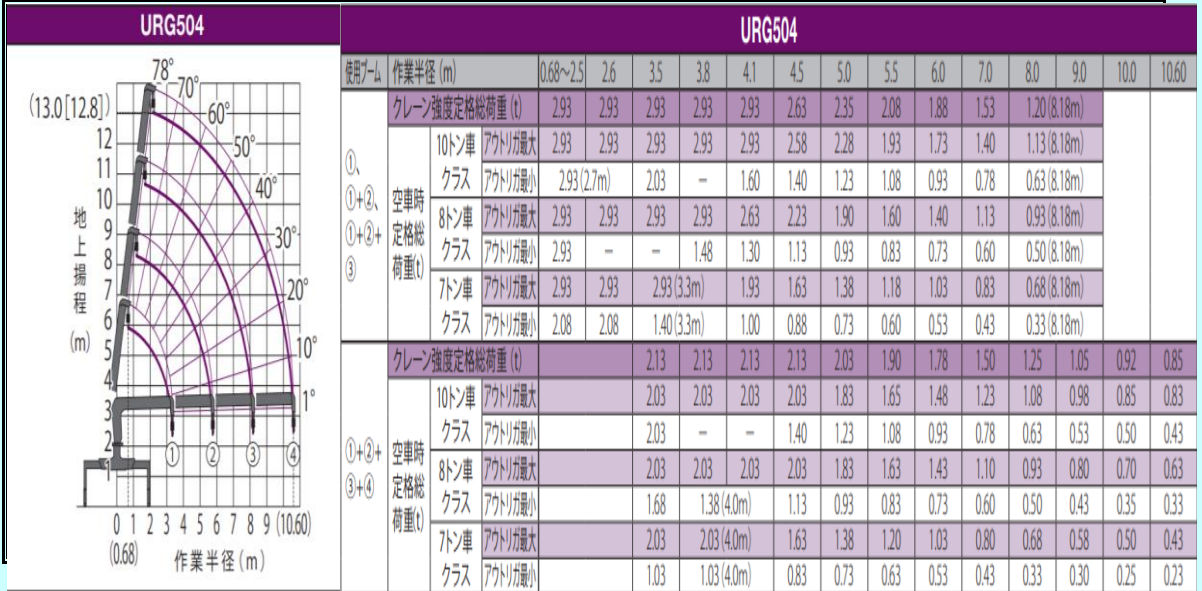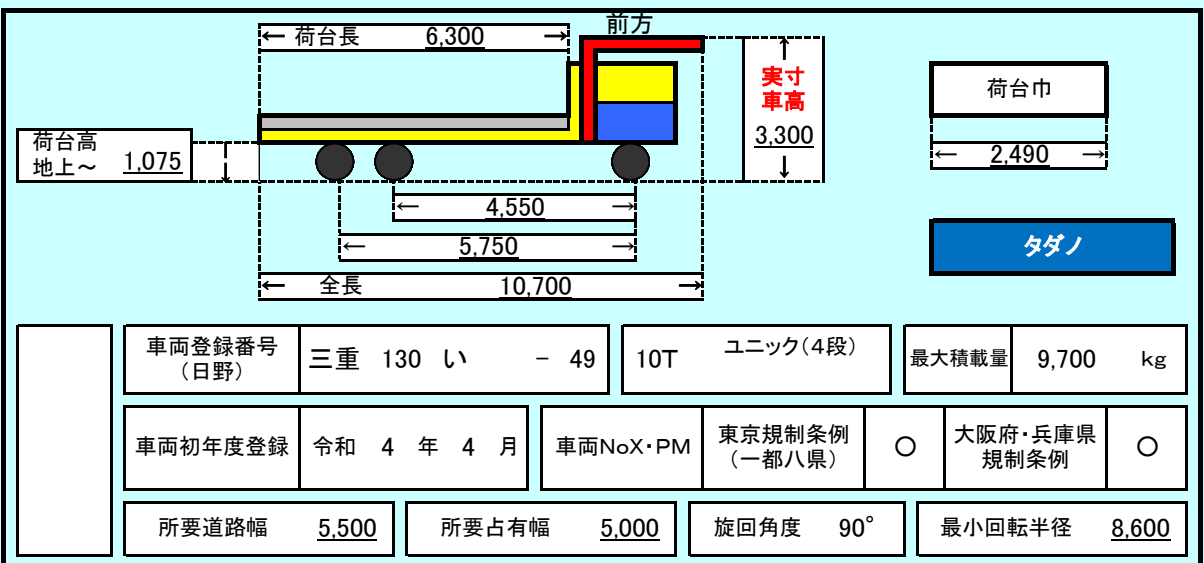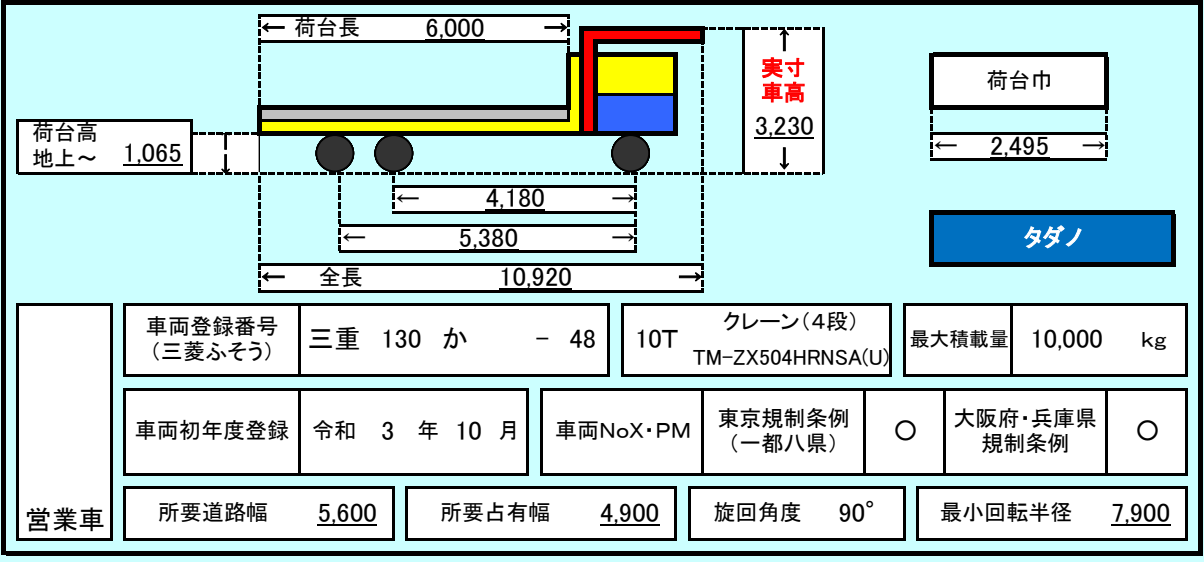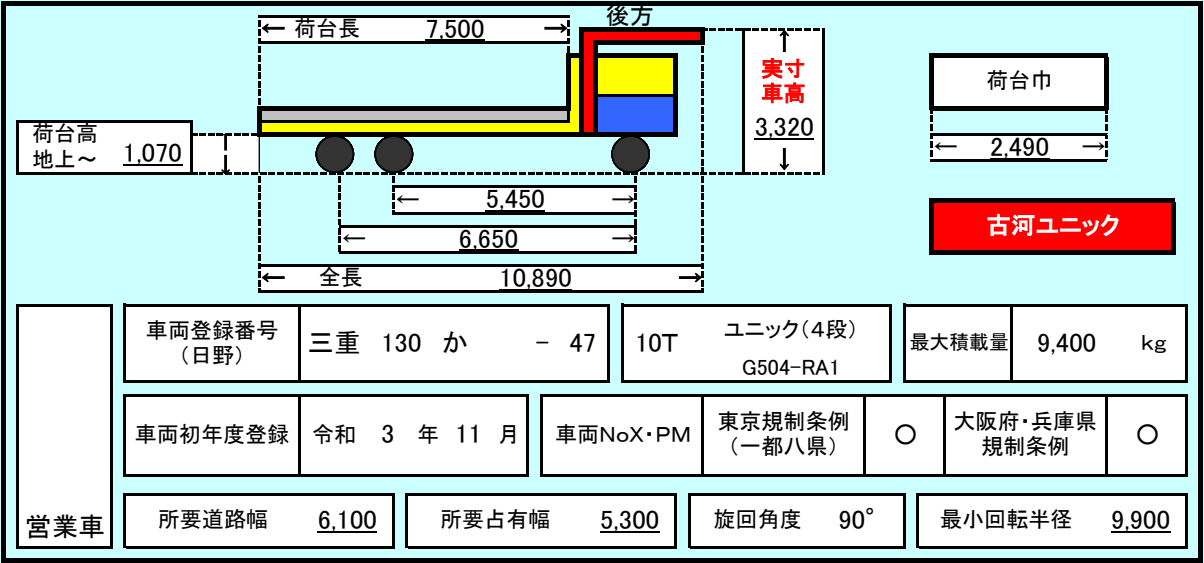



荷台長

6,300

前方

荷台巾

2,490

突寸車高

3,300

荷台高地上～

1,075

全長

10,700

4,550

5,750

タダノ

|                |               |              |                  |                       |                 |                       |       |
|----------------|---------------|--------------|------------------|-----------------------|-----------------|-----------------------|-------|
| 車両登録番号<br>(日野) | 三重 131 を - 50 | 10T ユニック(4段) | 最大積載量            | 9,700 kg              |                 |                       |       |
| 車両初年度登録        | 令和 4 年 4 月    | 車両NoX・PM     | 東京規制条例<br>(一都八県) | <input type="radio"/> | 大阪府・兵庫県<br>規制条例 | <input type="radio"/> |       |
| 所要道路幅          | 5,500         | 所要占有幅        | 5,000            | 旋回角度                  | 90°             | 最小回転半径                | 8,600 |

